

---

ABB MEASUREMENT & ANALYTICS | DATA SHEET

# **SensyTemp TSP111, TSP121, TSP131**

## Temperature sensors



# Measurement made easy

## Flexible due to modular design

**Design in accordance with DIN 43772 for low and medium process requirements**

### **Modular design**

- Measuring inset, thermowell, extension tube, connection head, transmitter

### **Interchangeable measuring inset**

- Interchangeable measuring inset

### **Transmitter in connection head**

- Optional LCD indicator
- Optional display function (type AS) or display with configuration function (type A)
- SIL 2 for transmitter

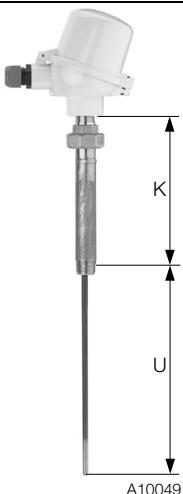
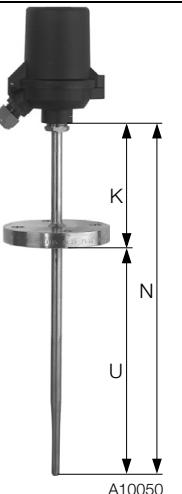
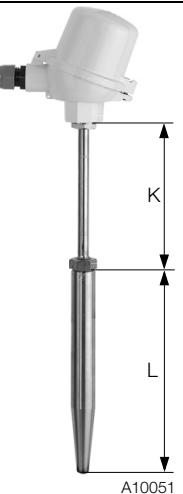
### **Approvals**

- SIL 2 for sensors with integrated transmitter, IECEx, ATEX, EAC Ex (GOST)

### **Areas of application**

- Chemical industry, Energy industry, General process engineering, Tank and pipeline construction, Mechanical engineering and plant construction

## Overview of temperature sensors

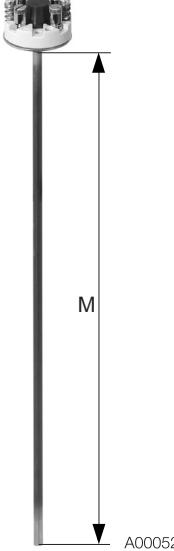
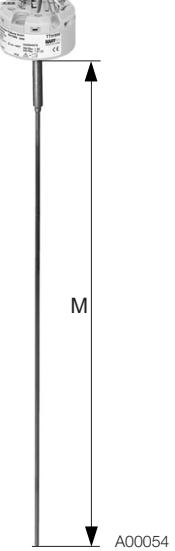
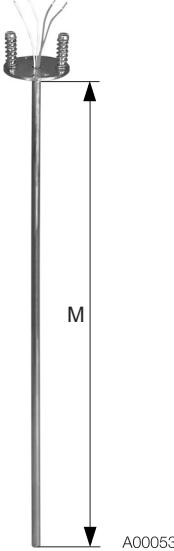
Type	TSP111	TSP121	TSP131
Legend: K = Extension tube length U = Installation length N = Nominal length L = Thermowell length	 A10049	 A10050	 A10051
Design	No thermowell, for installation in existing thermowell	Welded protective fitting manufactured from pipe material	Drilled thermowell manufactured from bar stock material
	Measuring inset, extension tube with thermowell interface, connection head, transmitter, optional LCD display		
Process connection	Insertion in an existing thermowell. Functional reliability is only assured with an additional thermowell!	Screw-in thread, flange, compression fitting	Welded connections, screw-in thread, flange
Transport temperature / Storage temperature	-20 ... 70 °C (-4 ... 158 °F)		
Maximum temperature limits	(depending on the sensor and material selected, the lower temperature value in each case counts)		
Sensor	Thin film resistor: 400 °C (752 °F), wire wound resistor: 800 °C (1472 °F), Thermocouples type K, N, J, E, L, S: 1600 °C (2912 °F)		
Material	316L / 1.4404	$\leq 800 \text{ }^{\circ}\text{C}$ (1472 °F)	
(other materials on request)	316Ti / 1.4571	$\leq 800 \text{ }^{\circ}\text{C}$ (1472 °F)	
	Inconel 600 / 2.4816	$\leq 1100 \text{ }^{\circ}\text{C}$ (2012 °F)	
	Hastelloy C276 / 2.4819	–	$\leq 1100 \text{ }^{\circ}\text{C}$ (2012 °F)
	Monel 400 / 2.4360	–	600 °C (1112 °F)
	1.7335	–	$\leq 540 \text{ }^{\circ}\text{C}$ (1004 °F)
	1.7380	–	$\leq 570 \text{ }^{\circ}\text{C}$ (1058 °F)
	1.5415	–	$\leq 500 \text{ }^{\circ}\text{C}$ (932 °F)
	E-CTFE	–	$\leq 120 \text{ }^{\circ}\text{C}$ (248 °F)
	Tantalum	–	$\leq 250 \text{ }^{\circ}\text{C}$ (482 °F)
Pressure		Maximum 40 ... 100 bar (580.15 bar ... 1450.38 psi)	Maximum 700 bar (10152.64 psi)

### NOTICE

The maximum temperatures and pressures specified are maximum values and do not take into consideration process-related stress. The effects of viscosity, medium velocity, pressure and temperature in the process usually cause these values to drop.

# SensyTemp TSP111, TSP121, TSP131 Temperature sensors

## Overview of measuring insets TSA101

Industrial thermocouples and industrial resistance thermometers		
Ceramic base with connection terminals	Permanently-mounted transmitter	Open connection wires
		

- Flexible and vibration-resistant ABB mineral insulated cable. The sheath for the resistance thermometer is manufactured from CrNi steel 1.4571 (316Ti) or nickel-base alloy 2.4816 (alloy 600) for thermocouples.
- Sensors in accordance with IEC 60751 platinum resistance thermometer with measuring ranges of -196 ... 800 °C (-320.8 ... 1472 °F) in three tolerance classes or thermocouples in accordance with IEC 60584 and ANSI MC96.1 with measuring ranges of -40 ... 1200 °C (-40 ... 2192 °F), each in two tolerance classes.
- Type S thermocouple in an accuracy class of 0 ... 1600 °C (32 ... 2912 °F).
- Fitted with single or double sensors.
- Optimum clamping at the measuring inset's holding plate is assured by generous spring travel (10 mm (0.39 inch)) on the part of the clamping springs.
- Measuring insets are available with outer diameters of 3 mm (0.12 inch), 4.5 mm (0.24 inch), 6 mm (0.24 inch), and for thermocouples also 8 mm (0.32 inch). 8 mm (0.32 inch) tip with sleeve and 10 mm (0.39 inch) tip with sleeve

M = Measuring inset length

Legend:

TSP111: M = U + K + 25 mm  
TSP121: M = N + 25 mm  
TSP131: M = L + K + 25 mm

K = Ext. tube length

U = Installation length

N = Nominal length

L = Thermowell length

## Installation instructions

The usual way of ensuring that thermal measurements are accurate is to comply with the minimum installation length of the temperature sensor. Ideally, in the case of pipelines, the sensor on a thermometer should be located in the center of the pipe. If this is not possible, both in the case of pipes and with containers, a minimum installation length of 10 to 15-times the thermowell diameter is assumed to be sufficient.

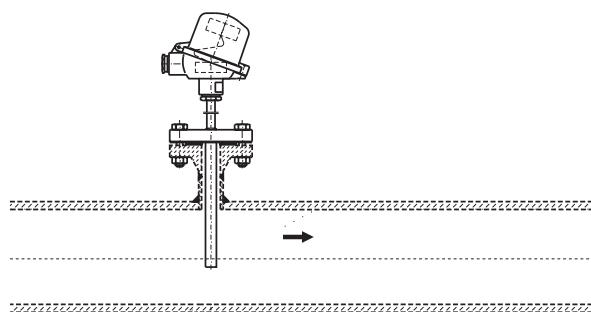


Fig. 1

### Insufficient nominal diameter

In the case of pipelines with very small nominal diameters, insertion inside an elbow pipe is recommended. The thermowell tip is set in opposition to the flow direction of the medium. Inserting the thermowell with an adapter at an acute angle against the flow direction can also distort measurement results.

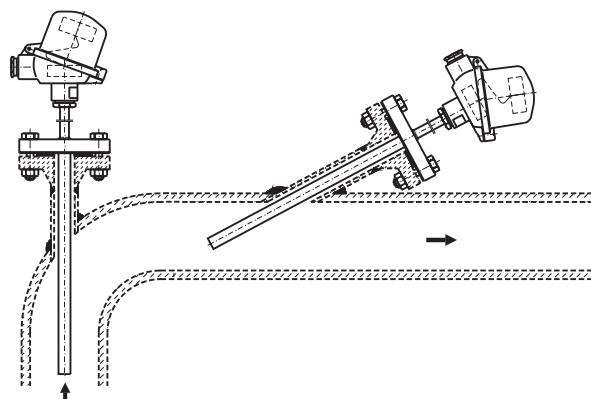


Fig. 2

## Specifications

### Resistance thermometer

The use of a mineral insulated cable and special installed measuring elements ensure very high vibration resistance of all measuring insets of the TSP temperature sensors.

The acceleration values of  $30 \text{ m/sec}^2$  (3 g), defined for already increased requirements in accordance with the standard IEC 60751, are exceeded by all measuring inset types for TSP temperature sensors.

Apart from thin film resistors that reach their accuracy class within the temperature ranges defined by the standard IEC 60751, ABB also offers thin film resistors (TF) with extended temperature range. These TFs comply with the accuracy classes A and AA in a range of  $-196 \dots 400^\circ\text{C}$  ( $-320.8 \dots 752^\circ\text{F}$ ) beyond the standard IEC 60751. These TFs are also available with increased resistance to vibration. The optimally suitable combination of measuring range, diameter, accuracy, and vibration resistance can be taken from the following tables.

### Designs

#### Basic design

Thin film resistor (TF)

	Measuring range	Vibration resistance
Class B	$-50 \dots 400^\circ\text{C}$ ( $-58 \dots 752^\circ\text{F}$ )	100 $\text{m/sec}^2$ (10 g) at 10 to 500 Hz
Class A	$-30 \dots 300^\circ\text{C}$ ( $-22 \dots 572^\circ\text{F}$ )	
Class AA	$0 \dots 100^\circ\text{C}$ ( $32 \dots 212^\circ\text{F}$ )	
Class A extended	$-196 \dots 400^\circ\text{C}$ ( $-321 \dots 752^\circ\text{F}$ )	
Class AA extended	$-196 \dots 400^\circ\text{C}$ ( $-321 \dots 752^\circ\text{F}$ )	

	Single sensor			Double sensor		
	2-W	3-W	4-W	2-W	3-W	4-W
3.0 mm, class B	●	●	●			
3.0 mm, class A		●	●			
3.0 mm, class AA		●	●			
4.5 mm, class B	●	●	●			
4.5 mm, class A		●	●			
4.5 mm, class AA		●	●			
6.0 mm, class B	●	●	●	●	●	●
6.0 mm, class A		●	●		●	●
6.0 mm, class AA		●	●		●	●

# SensyTemp TSP111, TSP121, TSP131

## Temperature sensors

### Increased vibration resistance

Thin film resistor (TF)

	Measuring range			Vibration resistance					
Class B	-50 ... 400 °C (-58 ... 752 °F)			600 m/sec <sup>2</sup> (60 g) at 10 to 500 Hz					
Class A	-30 ... 300 °C (-22 ... 572 °F)								
Class AA	0 ... 100 °C (32 ... 212 °F)								
Class A extended	-196 ... 400 °C (-321 ... 752 °F)								
Class AA extended	-196 ... 400 °C (-321 ... 752 °F)								

	Single sensor			Double sensor		
	2-W	3-W	4-W	2-W	3-W	4-W
3.0 mm, class B	●	●	●			
3.0 mm, class A	●	●				
3.0 mm, class AA	●	●				
4.5 mm, class B	●	●	●			
4.5 mm, class A	●	●				
4.5 mm, class AA	●	●				
6.0 mm, class B	●	●	●	●	●	●
6.0 mm, class A	●	●	●	●	●	
6.0 mm, class AA	●	●	●	●	●	●

### Extended measuring range

Wire wound resistor (WW)

	Measuring range			Vibration resistance		
Class B	-196 ... 800 °C (-320.8 ... 1472 °F)			100 m/sec <sup>2</sup> (10 g) at 10 to 500 Hz		
Class A	-100 ... 450 °C (-148 ... 842 °F)					

	Single sensor			Double sensor		
	2-W	3-W	4-W	2-W	3-W	4-W
3.0 mm, class B	●	●	●	●	●	
3.0 mm, class A	●	●		●		
4.5 mm, class B	●	●	●	●	●	
4.5 mm, class A	●	●	●	●		
6.0 mm, class B	●	●	●	●	●	●
6.0 mm, class A	●	●	●	●	●	●

### Extended measuring range, increased vibration resistance

Wire wound resistor (WW)

	Measuring range			Vibration resistance		
Class B	-196 ... 600 °C (-320.8 ... 1112 °F)			600 m/sec <sup>2</sup> (60 g) at 10 to 500 Hz		
Class A	-100 ... 450 °C (-148 ... 842 °F)					

	Single sensor			Double sensor		
	2-W	3-W	4-W	2-W	3-W	4-W
3.0 mm, class B						
3.0 mm, class A						
6.0 mm, class B	●	●	●	●	●	●
6.0 mm, class A	●	●	●	●	●	●

### Length specifications for the tip of the measuring inset

The following table shows the minimum immersion length, the temperature-sensitive length and the non-flexible length at the tip of the measuring inset.

Version	Minimum immersion length	Temperature-sensitive length	Non-flexible length
Basic design	70 mm (2.75 inch)	7 mm (0.28 inch)	30 mm (1.18 inch)
Increased vibration resistance	70 mm (2.75 inch)	10 mm (0.39 inch)	40 mm (1.57 inch)
Extended measuring range, increased vibration resistance	70 mm (2.75 inch)	50 mm (1.97 inch)	60 mm (2.36 inch)

## Accuracy classes of measurement resistors in accordance with IEC 60751

Both thin film resistors and wire wound resistors in accordance with IEC 60751 can be used across the entire range of application (also with increased accuracy class AA or class A). Subsequently, only the accuracy class of the temperature range used can remain valid.

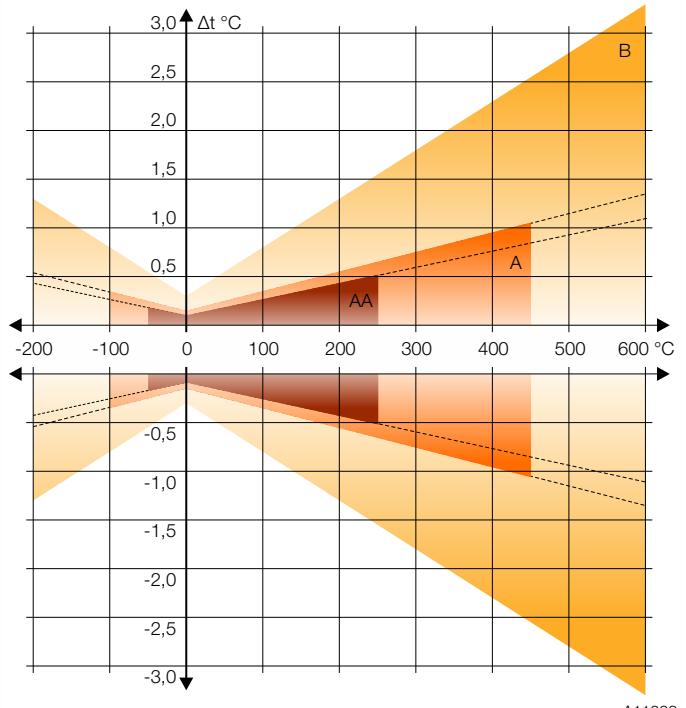
Example: A sensor of class AA is used at 290 °C. After the use (even short-term), Class A applies to this sensor, (example does not apply to the TFs of classes A extended and AA extended).

### Thin film resistor (TF), built-in

Class	$\Delta t = \pm (0.30 + 0.0050 \times [t])$	Temperature Range
Class B	$\Delta t = \pm (0.30 + 0.0050 \times [t])$	-50 ... 400 °C (58 ... 752 °F)
Class A	$\Delta t = \pm (0.15 + 0.0020 \times [t])$	-30 ... 300 °C (-22 ... 572 °F)
Class AA	$\Delta t = \pm (0.10 + 0.0017 \times [t])$	0 ... 100 °C (32 ... 212 °F)
Class A extended	$\Delta t = \pm (0.15 + 0.0020 \times [t])$	-196 ... 400 °C (-320.8 ... 752 °F)
Class AA extended	$\Delta t = \pm (0.10 + 0.0017 \times [t])$	-196 ... 400 °C (-320.8 ... 752 °F)

### Wire wound resistor (WW), built-in

Class	$\Delta t = \pm (0.30 + 0.0050 \times [t])$	Temperature Range
Class B	$\Delta t = \pm (0.30 + 0.0050 \times [t])$	-196 ... 600 °C (-320.8 ... 1112 °F)
Class A	$\Delta t = \pm (0.15 + 0.0020 \times [t])$	-100 ... 450 °C (-148 ... 842 °F)



A11228

Fig. 3: Graphical presentation of the accuracy classes  
Colored areas: Temperature range in accordance with IEC 60751 (WW)  
Dashed line: Extended temperature range

## Measuring errors with two-wire circuits

The electrical resistance of the copper inner conductor for the measuring inset affects the measured value for two-wire circuits and must be taken into consideration. It depends on the diameter and length of the measuring inset.

If the error cannot be compensated metrologically, the following reference values shall apply:

- Measuring inset Ø 3.0 mm:  $(0.281 \Omega/m \Rightarrow 0.7 \text{ } ^\circ\text{C}/m)$
- Measuring inset Ø 6.0 mm:  $(0.1 \Omega/m \Rightarrow 0.25 \text{ } ^\circ\text{C}/m)$

It is for this reason that ABB supplies three-wire / four-wire circuits as standard.

# SensyTemp TSP111, TSP121, TSP131

## Temperature sensors

### Thermocouples

The accuracy classes of the thermocouples meet the requirements of the international standard IEC 60584. On request, ABB can also supply thermocouples in accordance with ANSI MC96.1 and DIN 43710.

Since the values of both standards differ from each other only very slightly at low temperatures (up to approx.

300 °C(572 °F)), ABB recommends using thermocouples in accordance with IEC 60584. The tolerance specifications are presented in the table "Accuracy classes in accordance with IEC 60584".


The following table shows the temperature-sensitive length, the minimum immersion length, and the non-flexible length at the tip of the temperature sensor.

Version	Minimum immersion length	Temperature-sensitive length	Non-flexible length
Vibration-resistant up to 600 m/sec <sup>2</sup> (60 g)	70 mm (2.76 inch)	7 mm (0.28 inch)	30 mm (1.18 inch)
	<b>1K</b>	<b>2K</b>	<b>3K</b>
	<b>1J</b>	<b>2J</b>	<b>1L<sup>1)</sup></b>
	<b>2L<sup>1)</sup></b>	<b>1N</b>	<b>2N</b>
	<b>1T</b>	<b>2T</b>	<b>1E</b>
	<b>2E</b>	<b>1S</b>	<b>2S</b>
3.0 mm, class 2	●	●	●
3.0 mm, class 1	●	●	●
4.5 mm, class 2	●	●	
4.5 mm, class 1	●	●	
6.0 mm, class 2	●	●	●
6.0 mm, class 1	●	●	●

1) Tolerance in accordance with DIN 43710

### Accuracy classes in accordance with IEC 60584, DIN 43710 and ANSI MC96.1

IEC 60584	Class (CL)	Temperature range	Maximum measuring error
K (NiCr-Ni), N (NiCrSi-NiSi)	2	-40 ... 333 °C (-40 ... 631.4 °F)	±2.5 °C (36.5 °F)
		333 ... 1200 °C (631.4 ... 2192 °F)	±0.0075 x [t]
		1	-40 ... 375 °C (-40 ... 707 °F)
			375 ... 1000 °C (707 ... 1832 °F)
			±1.5 °C (34.7 °F)
		2	375 ... 750 °C (631.4 ... 1382 °F)
			±0.0075 x [t]
			±1.5 °C (34.7 °F)
J (Fe-CuNi)	2	-40 ... 333 °C (-40 ... 631.4 °F)	±2.5 °C (36.5 °F)
		333 ... 750 °C (631.4 ... 1382 °F)	±0.0075 x [t]
		1	-40 ... 375 °C (-40 ... 707 °F)
			375 ... 750 °C (707 ... 1382 °F)
			±0.004 x [t]
			±1.5 °C (34.7 °F)
T (Cu-CuNi)	2	-40 ... 133 °C (-40 ... 271.4 °F)	±1.0 °C (33.8 °F)
		133 ... 350 °C (271.4 ... 662 °F)	±0.0075 x [t]
		1	-40 ... 125 °C (-40 ... 257 °F)
			125 ... 350 °C (257 ... 662 °F)
			±0.005 x [t]
			±1.0 °C (33.8 °F)
S (Pt10%Rh-Pt)	2	0 ... 600 °C (32 ... 1112 °F)	±1.5 °C (34.7 °F)
		600 ... 1600 °C (1112 ... 2912 °F)	±0.0025 x [t]
	2	-40 ... 333 °C (-40 ... 631.4 °F)	±2.5 °C (36.5 °F)
		333 ... 900 °C (631.4 ... 1652 °F)	±0.0075 x [t]
E (NiCr-CuNi)	1	-40 ... 375 °C (-40 ... 707 °F)	±1.5 °C (34.7 °F)
		375 ... 800 °C (707 ... 1472 °F)	±0.004 x [t]

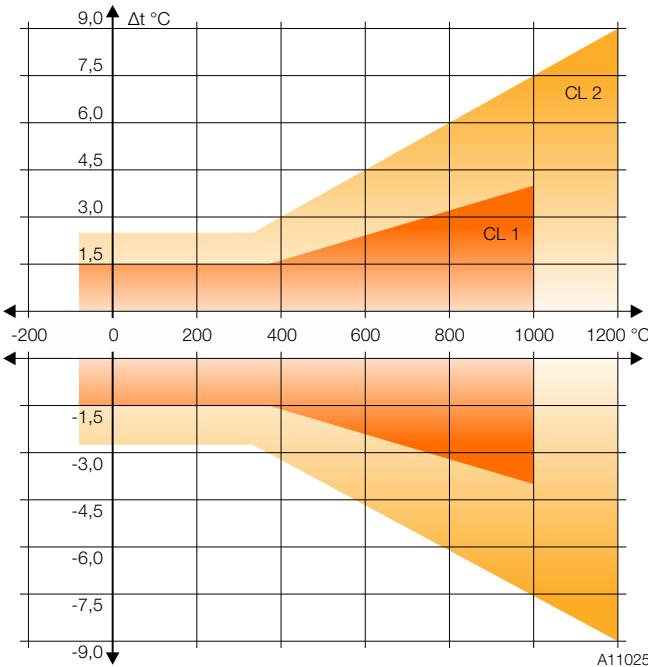

**Fig. 4:** Graphical representation of the accuracy classes using type K and N as examples in accordance with IEC 60584. See tables for other types.

ANSI MC 96.1	Class (CL)	Temperature range	Maximum measuring error
K (NiCr-Ni), N (NiCrSi-NiSi)	Standard	0 ... 293 °C (32 ... 559.4 °F)	±2.2 °C (35.96 °F)
		293 ... 1250 °C (559.4 ... 2282 °F)	±0.0075 x [t]
	Special	0 ... 275 °C (32 ... 527 °F)	±1.1 °C (33.98 °F)
		275 ... 1250 °C (527 ... 2282 °F)	±0.0040 x [t]
J (Fe-CuNi)	Standard	0 ... 293 °C (32 ... 559.4 °F)	±2.2 °C (35.96 °F)
		293 ... 750 °C (559.4 ... 1382 °F)	±0.0075 x [t]
	Special	0 ... 275 °C (32 ... 527 °F)	±1.1 °C (33.98 °F)
		275 ... 750 °C (527 ... 1382 °F)	±0.0040 x [t]
N (NiCrSi-NiSi)	Standard	0 ... 293 °C (32 ... 559.4 °F)	±2.2 °C (35.96 °F)
		293 ... 1250 °C (559.4 ... 2282 °F)	±0.0075 x [t]
	Special	0 ... 275 °C (32 ... 527 °F)	±1.1 °C (33.98 °F)
		275 ... 1250 °C (527 ... 2282 °F)	±0.0040 x [t]

DIN 43710	Temperature range	Maximum measuring error
L (Fe-CuNi)	50 ... 400 °C (122 ... 752 °F)	±3.0 °C (37.4 °F)
	400 ... 900 °C (752 ... 1652 °F)	±0.0075 x [t]

#### Insulation resistance of measuring inset

The insulation resistance is measured between the outer sheath and measuring circuit. If there are two measuring loops, the insulation resistance between both measuring loops is also measured.

The following applies for all measuring inset types:

- 500 V DC
- Insulation resistance  $R_{iso} \geq 500M\Omega$  with an ambient temperature range of 15 ... 35 °C (59 ... 95 °F)
- Humidity < 80 %.

Thanks to a special process used during manufacturing, ABB measuring insets can boast outstanding insulation values even at high temperatures.

# SensyTemp TSP111, TSP121, TSP131

## Temperature sensors

### Thermowells

#### Thermowell functions

- Protection against aggressive media, high process pressures, and high flow rates
- Replacement or recalibration of the measuring unit without interrupting the process

Depending on the medium, temperature and process pressure, several different designs and materials are available. The thermowells are divided into two categories:

- Welded protective fittings manufactured from pipe material for TSPX21
- Drilled thermowells manufactured from bar stock material for TSPX31

Available in accordance with DIN 43772 or ABB standard.

#### Use in highly aggressive media

- A special coating of PFA or ECTFE with a standard coat thickness of 0.5 mm (0.02 inch) can be applied for the corresponding usage.

#### Use in highly corrosive applications

- For thermowells with flange, a tantalum sheath can be applied for the corresponding usage.









If required, contact your ABB partner.

#### Response times in accordance with IEC 60751 and IEC 60584

The thermowell used in each application and the thermal contact between thermowell and measuring inset have an impact on the response times of TSP temperature sensors. In the case of TSPX21 and TSPX31 temperature sensors, the design of the thermowell tip has been adapted to the measuring inset. This maximizes heat transmission. The following table shows typical response times for the SensyTemp TSP series, measured in accordance with IEC 60751 in water with 0.4 m/s and a temperature rise from 25 °C (77 °F) to 35 °C (95 °F).








Thermowell form	Diameter [mm]	In water 0.4 m/s	
		t <sub>0.5</sub>	t <sub>0.9</sub>
<b>Resistance thermometer</b>			
2, 2G, 2F, 2G0	9 x 1	25	77
	11 x 2	23	64
3, 3G, 3F	12 / 9 mm tip	15	38
2S, 2GS, 2FS, 2GS0	12 / 6 mm tip	21	55
<b>Thermocouples</b>			
2, 2G, 2F, 2G0	9	10	24
	11	12	28
3, 3G, 3F	12 / 9 mm tip	12	24
2S, 2GS, 2FS, 2GS0	12 / 6 mm tip	6	14
	14 / 6 mm tip	6	14

## Welded thermowells (TSP121)

Straight shaft	DIN 43772 – form 2	DIN 43772 – form 2G	DIN 43772 – form 2F
M24 x 1.5 head connection			
			
1.4571/316Ti	F1 = 12, 14 mm	F1 = 9, 11, 12, 14 mm	F1 = 11, 12, 14 mm
1.4404/316L	F1 = 12, 14 mm	F1 = 12, 14 mm	F1 = 12, 14 mm
2.4819/C-276	—	F1 = 13.7 mm <sup>1)</sup>	F1 = 13.7 mm <sup>1)</sup>
Measuring inset	Ø 6 mm	Ø 6 mm	Ø 6 mm
Tapered tip	DIN 43772 – form 3	DIN 43772 – form 3G	DIN 43772 – form 3F
M24 x 1.5 head connection			
			
1.4571/316Ti	F1/F3 = 12/9, 16/10 mm	F1/F3 = 12/9 mm	F1/F3 = 12/9, 16/10 mm
1.4404/316L	F1/F3 = 12/9 mm	F1/F3 = 12/9 mm	F1/F3 = 12/9 mm
Measuring inset	Ø 6 mm	Ø 6 mm	Ø 6 mm

# SensyTemp TSP111, TSP121, TSP131

## Temperature sensors

Stepped tip	ABB – form 2S	ABB – form 2GS	ABB – form 2FS
M24 x 1.5 head connection			
			
1.4571/316Ti	F1/F3 = 12/6, 14/6 mm	F1/F3 = 11/6, 12/6, 14/6 mm	F1/F3 = 11/6, 12/6, 14/6 mm
1.4404/316L	F1/F3 = 12/6, 14/6 mm	F1/F3 = 12/6, 14/6 mm	F1/F3 = 12/6, 14/6 mm
2.4819/C-276	—	F1/F3 = 13.7/6 mm <sup>1)</sup>	F1/F3 = 13.7/6 mm <sup>2)</sup>
Measuring inset	Ø 3 mm	Ø 3 mm	Ø 3 mm
Straight shaft without extension tube	ABB – form 2G0	Stepped tip without extension tube	ABB – form 2GS0
M24 x 1.5 head connection			
			
1.4571/316Ti	F1 = 9, 11, 12 mm <sup>1)</sup>	1.4571/316Ti	F1/F3 = 11/6, 12/6 mm <sup>1)</sup>
Measuring inset	Ø 6 mm	Measuring inset	Ø 3 mm

1) Only with G1/2A, 1/2" NPT thread




2) Flange 1.4571/316Ti, flange disc 2.4819/C-276

Other diameters and materials available on request.

## Drilled thermowells (TSP131)

Weld-in thermowell	DIN 43772 – form 4	DIN 43772 – form 4	ABB – form PW
Extension tube connection	M18 x 1.5	M14 x 1.5	1/2" NPT
Material	1.4404/316L; 1.4571/316Ti; 1.7335/13CrMo4-5; 1.5415/15Mo3	1.4404/316L; 1.4571/316Ti; 1.7335/13CrMo4-5; 1.5415/15Mo3	1.4404/316L; 1.4571/316Ti 1.4876/Incoloy 800; 2.4360/Monel 400 2.4816/Inconel 600; 2.4819/C-276
F3/F2/F1	d1	24h7/12.5 mm      7 mm	18h7/9 mm      3.5 mm
Measuring inset		Ø 6 mm	Ø 3 mm
Flange thermowell	DIN 43772 – form 4F	DIN 43772 – form 4FS	ABB – form PF
Extension tube connection	M18 x 1.5	M14 x 1.5	1/2" NPT
Material	1.4404/316L; 1.4571/316Ti	1.4404/316L; 1.4571/316Ti	1.4404/316L; 1.4571/316Ti 1.4876/Incoloy 800; 2.4360/Monel 400 <sup>1)</sup> 2.4816/Inconel 600; 2.4819/C-276 <sup>1)</sup>
F3/F2/F1	d1	24/12.5 mm      7 mm	18/9 mm      3.5 mm
Measuring inset		Ø 6 mm	Ø 3 mm
1) 1.4876/Incoloy 800; 2.4360/Monel 400; 2.4816/Inconel 600; 2.4819/C-276 with flange in 1.4571/316Ti and flange disc			

# SensyTemp TSP111, TSP121, TSP131 Temperature sensors

Screw-in thermowell	ABB – form PS	ABB – form PS	ABB – form PS
Extension tube connection	1/2" NPT; WAF 36	1/2" NPT; WAF 27	1/2" NPT; WAF 27
			
Material	1.4404/316L; 1.4571/316Ti; 1.4876/Incoloy 800; 2.4360/Monel 400; 2.4816/Inconel 600; 2.4819/C-276		
F3/F1	d1	25/16 mm	7 mm
Measuring inset		Ø 6 mm	Ø 6 mm
		17/13.5 mm	7 mm

Other diameters and materials available on request.

## Standard lengths

### Welded thermowells mm (inch)

Form	N = 230 (9.055)	U = 100 (3.94)
2; 2G; 2F,	N = 290 (11.42)	U = 160 (6.30)
3; 3G; 3F;	N = 380 (14.96)	U = 250 (9.84)
2S; 2GS; 2FS	N = 530 (20.87)	U = 400 (15.75)

### Drilled thermowells mm (inch)

Form 4	L = 140 (5.51)	C = 65 (2.56)
	L = 200 (7.87)	C = 65 (2.56)
	L = 200 (7.87)	C = 125 (4.92)
	L = 260 (10.24)	C = 125 (4.92)
	L = 410 (16.14)	C = 275 (10.83)
Form 4S	L = 110 (4.33)	C = 65 (2.65)
	L = 140 (5.51)	C = 65 (2.65)
Form PW; PF; PS	U = 100 (3.94), 150 (5.91), 200 (7.87), 250 (9.84), 300 (11.81), 350 (13.78)	L = U + 65 (2.56)
Form 4F	U = 130 (5.12), L = 200 (7.87)	C = 65 (2.56)
	U = 190 (7.48), L = 260 (10.24)	C = 125 (4.92)
	U = 340 (13.39), L = 410 (16.14)	C = 275 (10.83)
Form 4FS	U = 130 (5.12), L = 200 (7.87)	C = 65 (2.65)

### Pressure and vibration resistance of thermowell

The permissible compressive loads for thermowells at various temperatures are illustrated in the following figures (thermowells conforming to DIN 43772).

The curves can also be applied to identical thermowell models.

### Thermowell form 2 (material 1.4571)

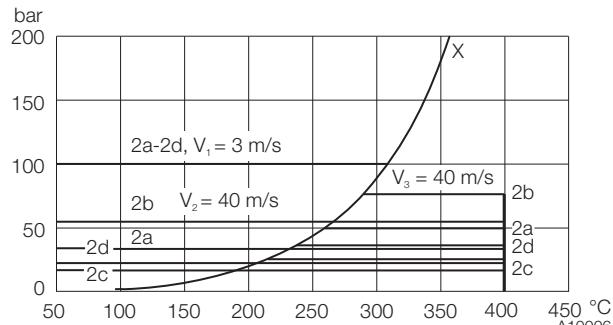


Fig. 5

X Vapor-pressure curve

V<sub>1</sub> Flow rate in water

V<sub>2</sub> Flow rate in air

V<sub>3</sub> Flow rate in steam

Curve	Installation length (mm)	Thermowell diameter (mm)
2a	250	11
2b	250	14
2c	400	11
2d	400	14

### Thermowell form 3 (material 1.4571)

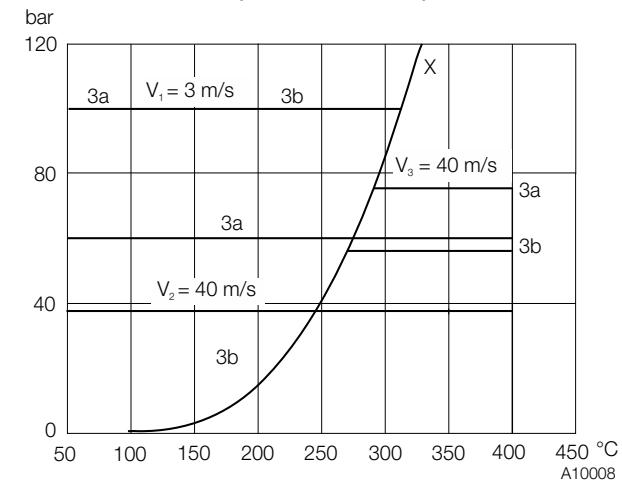


Fig. 6

X Vapor-pressure curve

V<sub>1</sub> Flow rate in water

V<sub>2</sub> Flow rate in air

V<sub>3</sub> Flow rate in steam

Curve	Installation length (mm)	Thermowell diameter (mm)
3a	225	12/9
3b	285	12/9

# SensyTemp TSP111, TSP121, TSP131 Temperature sensors

**Thermowell form 4 (material 1.4571)**

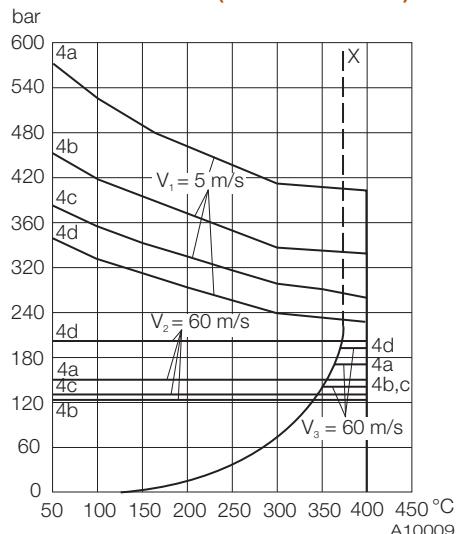


Fig. 7

- X Vapor-pressure curve
- $V_1$  Flow rate in water
- $V_2$  Flow rate in air
- $V_3$  Flow rate in steam

Curve	Installation length (mm)	Thermowell diameter (mm)
4a	65	18
4b	125	24
4c	125	26
4d	125	32

**Thermowell form 4 (material 1.7335 and 1.7380))**

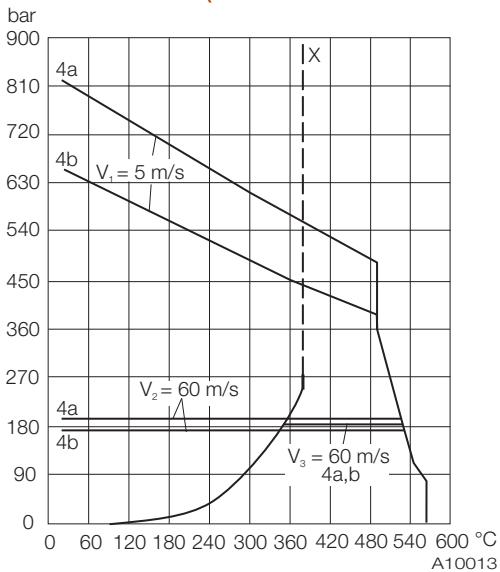


Fig. 8

- X Vapor-pressure curve
- $V_1$  Flow rate in water
- $V_2$  Flow rate in air
- $V_3$  Flow rate in steam

Curve	Installation length (mm)	Thermowell diameter (mm)
4a	65	18
4b	125	24

## NOTICE

The diagrams above have been taken from DIN 43772. They are based on the Dittrich calculation model. They do not take possible vibration caused by vortex excitation of the flowing medium into account.

ABB's standard thermowells are sufficiently robust for most industrial applications provided that design, material, and length are properly selected.

Most thermowell failures are caused by flow-related vibration. For this reason, ABB offers a stress analysis for ABB thermowells, based on the respective usage parameters.

The stress analysis conforms to ASME PTC 19.3-2010. It is based on recognized theoretical methods and is intended to support thermowell selection for critical applications. It is not, however, a guarantee against failure of the thermowell.

Given the relatively unreliable computational estimation of the natural frequency of a thermowell and taking the numerous influencing factors into account, experimental testing is recommended in critical cases.

For more detailed information about thermowell loads and calculation methods, please see DIN 43772.

## Process connections

### SensyTemp TSP121 temperature sensor

Plug-in thermowells, welded	Sliding connection
DIN 43772 – form 2, straight shaft	G1/2"A, 1/2" NPT
DIN 43772 – form 3, tapered tip	
ABB – form 2S, stepped tip	

### NOTICE

All ABB compression fittings are manufactured from CrNi-steel and are supplied without material certification in accordance with EN 10204.

Screw-in thermowells, welded	Fixed connection
DIN 43772 – form 2G, straight shaft	G3/8"A, G1/2"A, G3/4"A, G1"A, 1/2" NPT, 3/4" NPT, 1" NPT
DIN 43772 – form 3G, tapered tip	M20 x 1,5, M27 x 2,
ABB – form 2GS, stepped tip	1/2" BSPT, 3/4" BSPT, 1" BSPT
ABB – form 2G0, without extension tube	G1/2"A, 1/2" NPT
ABB – form 2GS0, without extension tube	
Stepped tip	

Flange thermowells, welded	Flange in accordance with EN 1092-1 Sealing surface form B1/B2 <sup>1)</sup>	Flange in accordance with ASME <b>B16.5 TW</b> Sealing surface form RF <sup>1)</sup>	Tri-clamp flange <b>BS4825</b>
DIN 43772 – form 2F, straight shaft	DN 15, PN 10 ... PN 40 DN 20, PN 10 ... PN 40 DN 25, PN 10 ... PN 40, PN 63 ... PN 100 DN 32, PN 16 ... PN 40, PN 63 ... PN 100 DN 40, PN 10 ... PN 40, PN 63 ... PN 100	Nominal diameter 1", Nominal pressure 150, 300, 600 lbs. Nominal diameter 1 1/2", nominal pressure 150, 300, 600, 900/1500 lbs.	On request
DIN 43772 – form 3F, tapered tip	DN 50, PN 6, PN 10 ... PN 40, PN 63 ... PN 100 DN 80, PN 16 DN 100, PN 40	Nominal diameter 2", nominal pressure 150, 300, 600, 900/1500 lbs.	
ABB – form 2FS, stepped tip			

1) Others available on request

# SensyTemp TSP111, TSP121, TSP131

## Temperature sensors

### SensyTemp TSP131 temperature sensor

<b>Weld-in thermowells, drilled</b>			
Weld-in thermowells are available as DIN 43772 form 4 and ABB form PW. Other forms are available on request.			
<b>Screw-in thermowells, drilled</b>	<b>Screw-in thread</b>		
DIN 43772 – form 6 and ABB form PS	G1/2"A, 1/2" NPT, 3/4" NPT, 1" NPT, M20 x 1.5		
<b>Flange thermowells, drilled</b>  DIN 43772 – form 4F, F2 = 18 mm, 24 mm, 26 mm, thermowell manufactured from bar stock material  ABB – form PF, thermowell manufactured from bar stock material	<b>Flange in accordance with EN 1092-1</b> Sealing surface form B1/B2 <sup>1)</sup>  DN 25, PN 10 ... PN 40, PN 63 ... PN 100 DN 32, PN 16 ... PN 40 DN 40, PN 10 ... PN 40, PN 63 ... PN 100 DN 50, PN 6, PN 10 ... PN 40, PN 63 ... PN 100 DN 80, PN 16 DN 100, PN 40	<b>Flange in accordance with ASME B16.5 TW</b> Sealing surface form RF <sup>1)</sup>  Nominal diameter 1", nominal pressure 150, 300, 600 lbs. Nominal diameter 1 1/2", nominal pressure 150, 300, 600, 900 / 1500 lbs. Nominal diameter 2", nominal pressure 150, 300, 600, 900/1500 lbs.	<b>Tri-clamp flange BS4825</b>  On request

1) Others available on request

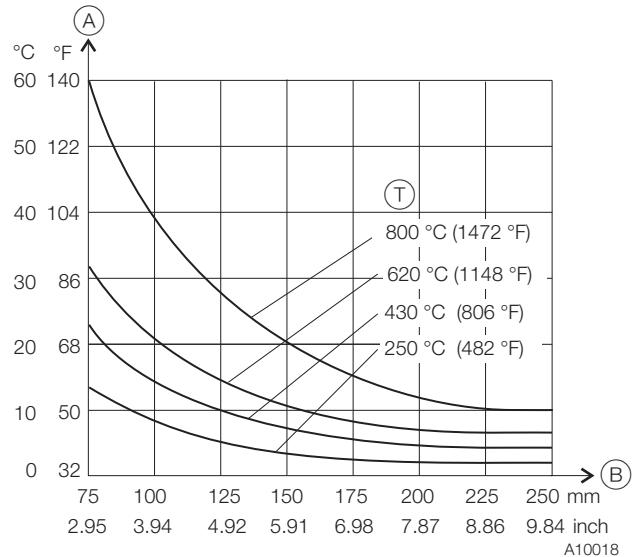
### NOTICE

Other process connections are available on request. If required, contact your ABB partner.

## Extension tubes





The extension tube is the component between thermowell and connection head. It is used to bridge any existing insulation or serves as a cooling section between the temperature-sensitive electronics of the transmitter in the connection head and the process.

The relation illustrated in Fig. 9 led to the selection of the standard extension tube with length  $K = 130$  mm (5.12 inch). If the two threads are manufactured in one part (known as a double nipple), a minimum length of  $K = 25$  mm (0.98 inch) is possible.



**Fig. 9**  
 (A) Overtemperature at the connection head compared to the ambient temperature (B) Extension tube length (T) Flange temperature

## Extension tube models

	Cylindrical screw-in thread	Conical screw-in thread	Lock nut, rotatable	1/2" NPT - 1/2" NPT, not separable (nipple)	1/2" NPT - 1/2" NPT, separable (nipple-union)	1/2" NPT - 1/2" NPT, separable (nipple-union-nipple)
Head connection	M24 x 1.5			1/2" NPT		
	 A11153	 A11057	 A11152	 A11151	 A11058	 A11059
Thermowell connection	M14 x 1.5; M18 x 1.5; M20 x 1.5; G3/8", G1/2"	1/2" NPT	G 1/2"	1/2" NPT		
Material	1.4571/316Ti					

## NOTICE

TSP1x1 are also available without an extension tube.

# SensyTemp TSP111, TSP121, TSP131 Temperature sensors

## Connection heads

### Functions of the connection head

- Housing for a transmitter or a terminal block
- Protection of the connection area against adverse environmental effects

All ABB standard heads provide IP rating of at least IP 66, in combination with an ABB thermowell and the M20 x 1.5 cable gland (supplied).

### NOTICE

The cable glands used are suitable for permanent cable installation.

As an option, the connection heads are also available with a cable entry 1/2" NPTF (without cable gland). In this case, the user must put appropriate measures in place to ensure that the required IP rating level is maintained.




### Ambient temperature at connection head

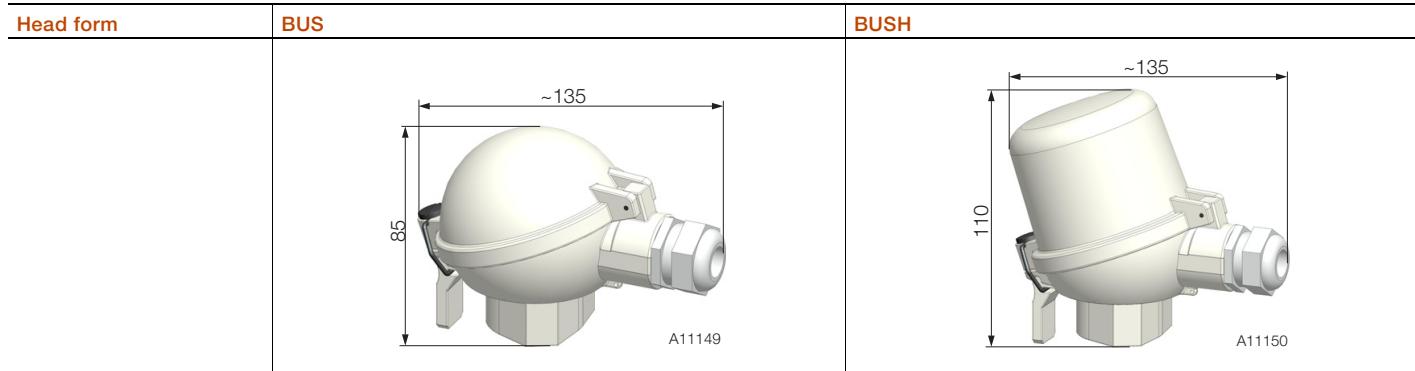
Connection head without transmitter and without cable gland	-40 ... 120 °C (-40 ... 248 °F)
Connection head with transmitter	-40 ... 85 °C (-40 ... 185 °F)
Connection head with LCD indicator	-20 ... 70 °C (-4 ... 158 °F)

### **i** NOTICE

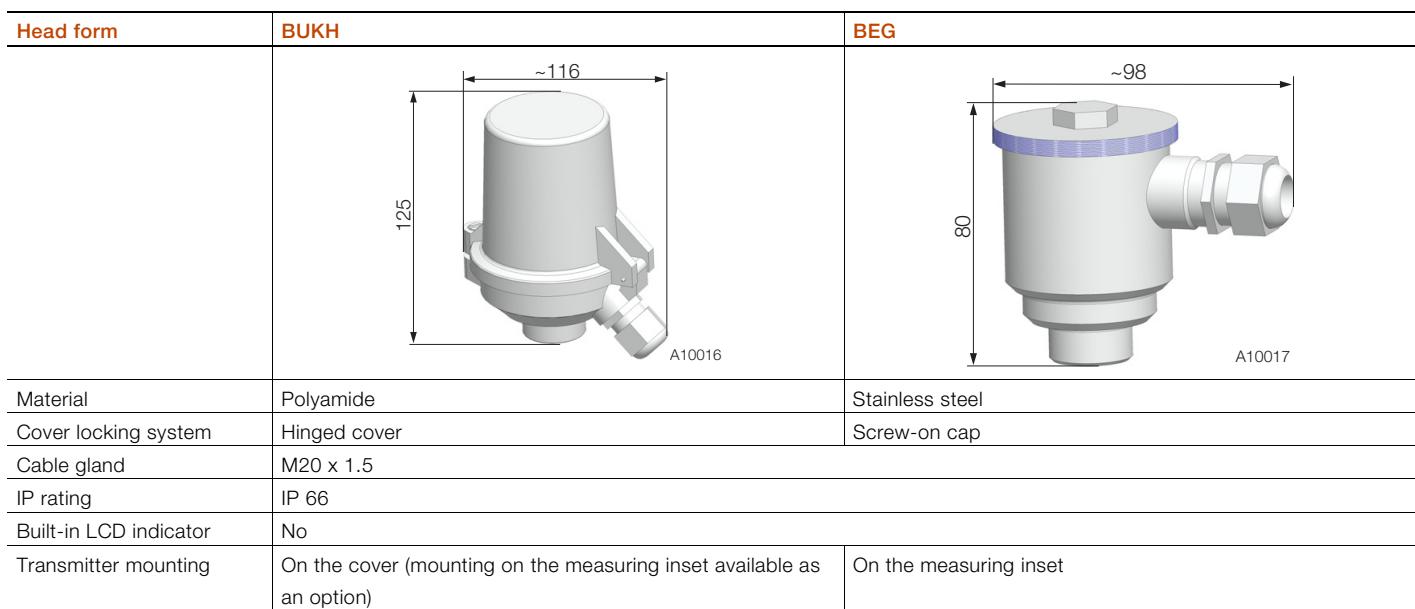
In case of using in explosive environments, restrictions of the ambient temperature range are possible. The notes of the corresponding declarations of conformity and type examination certificate are to be followed.

The cable gland made of plastic used by default for cable outer diameter of 5.5 ... 13 mm (0.22 ... 0.51 inch) is suitable for a temperature range of -40 ... 70 °C (-40 ... 158 °F). For temperatures outside this range, an appropriate cable gland can be installed.

Head form	BUZ	BUZH	BUZHD
	 A10012	 A00014	 A10015
Material	Aluminum, epoxy-coated		
Cover locking system	Hinged cover with screw plug		
Cable gland	M20 x 1.5, optional cable entry 1/2" NPTF, without cable gland		
IP rating	IP 66		
Built-in LCD indicator	No	No	Yes
Transmitter mounting	On the measuring inset	On the cover (mounting on the measuring inset available as an option)	On the measuring inset



Material	Aluminum, epoxy-coated	
Cover locking system	Hinged cover with snap fastener	
Cable gland	M20 x 1.5, optional cable entry 1/2" NPTF, without cable gland	
IP rating	IP 66	
Built-in LCD indicator	No	
Transmitter mounting	On the measuring inset	On the cover (mounting on the measuring inset available as an option)



Dimensions in mm

# SensyTemp TSP111, TSP121, TSP131 Temperature sensors

## Transmitter

Installing a transmitter has the following advantages:

- Decreased cost due to reduced wiring.
- Amplification of the sensor signal at the measuring point and conversion to a standard signal (thereby increasing the signal's interference immunity).
- Option to install an LCD indicator in the connection head.
- SIL2 with accordingly classified transmitter.

The output signal of a temperature sensor is determined by the selection of the corresponding transmitter. When using ABB transmitters, self-heating can be ignored.

The following output signals are available:

Type	
TTH200 HART 4 ... 20 mA, HART	 A11232
TTH300 HART 4 ... 20 mA, HART	 A11233
TTH300 PA PROFIBUS PA	 A11234
TTH300 FF FOUNDATION Fieldbus H1	 A11235

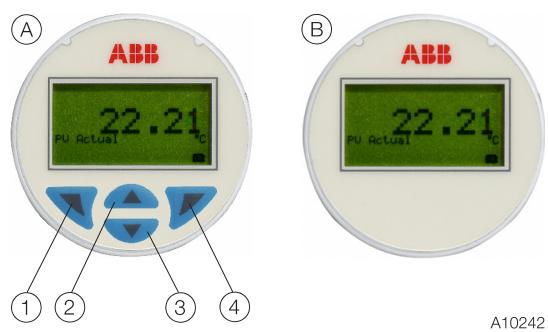
### NOTICE

Further information on the transmitters listed above can be found in the data sheets DS/TTH200 and DS/TTH300.

## Type A and type AS LCD indicator

The BUZHD connection head is equipped with a digital LC display. A suitable transmitter is connected via an add-on interface cable.

We recommend using an LC display with type AS display function if you are using a TTH200. If the TTH300 transmitter is selected, the type A LCD indicator can also be used to configure the transmitter.



A10242

Fig. 10: (A) LCD indicator type A (B) LCD indicator type AS  
① Exit / Cancel ② Scroll back ③ Scroll forwards ④ Select

## Functional safety (SIL)

SensyTemp TSP temperature sensors with SIL certified transmitters fitted ex works are available with conformity in accordance with IEC 61508 for use in safety-related applications up to SIL 3 (redundant). When using a transmitter, the device fulfills the requirements in accordance with SIL 2. When using two redundant transmitters, the device fulfills the requirements in accordance with SIL 3.

Information regarding functional safety for SensyTemp TSP temperature sensors can be found in the SIL safety instructions.

Information about temperature sensors without built-in electronics can be found in the operating instruction.

## Use in potentially explosive atmospheres in accordance with ATEX

### Approvals

TSP1X1 temperature sensors are approved for a variety of applications.

These range from metrological approvals to explosion-protection certification for individual countries as well as ATEX certificates valid throughout the EU.

Specifically, these are:

- ATEX Ex i PTB 01 ATEX 2200 X
- Ex n Zone 2 and 22 Manufacturer declaration
- IExEx
- GOST / EAC Ex

### NOTICE

For devices with ATEX Ex d certification, refer to the documentation for the TSP3X1 temperature sensor.

### Conditions for the use in potentially explosive areas

The operator assumes responsibility for the proper installation according to the valid approval conditions when replacing the measuring inset in a thermometer. It is necessary to specify the production no. marked on the old part to ABB, so that ABB can examine the conformity of the ordered execution with the first delivery and the applicable approval.

### Thermal resistance

The following table lists thermal resistances for measuring insets in diameter < 6.0 mm (0.24 inch) and  $\geq$  6.0 mm (0.24 inch). The values have been specified subject to the conditions "Gas with a flow velocity of 0 m/s" and "Measuring inset without or with an additional thermowell".

Thermal resistance $R_{th}$ $\Delta t = 200 \text{ K/W} \times 0.038 \text{ W} = 7.6 \text{ K}$	Measuring inset $\varnothing < 6 \text{ mm}$ (0.24 inch)	Measuring inset $\varnothing \geq 6 \text{ mm}$ (0.24 inch)
Without thermowell		
Resistance thermometer	200 K/W	84 K/W
Thermocouple	30 K/W	30 K/W
With thermowell		
Resistance thermometer	70 K/W	40 K/W
Thermocouple	30 K/W	30 K/W

K/W = kelvin per watt

### Temperature rise in the event of a fault

In the event of a fault, the temperature sensors will exhibit a temperature rise  $\Delta t$  as appropriate for the applied power. This  $\Delta t$  temperature rise must be taken into account with regard to the difference between process temperature and temperature class.

### NOTICE

In the event of a fault (short-circuit), the dynamic short-circuit current that occurs in the measurement circuit for a matter of milliseconds is not relevant with regard to temperature rise.

The  $\Delta t$  temperature rise can be calculated using the following formula:  $\Delta t = R_{th} \times P_o [\text{K/W} \times \text{W}]$

- $\Delta t$  = Temperature rise
- $R_{th}$  = Thermal resistance
- $P_o$  = Output power of an additional connected transmitter

### Example:

Resistance thermometer diameter 3 mm (0.12 inch) without thermowell:

$$R_{th} = 200 \text{ K/W},$$

Temperature transmitter TTHXXX  $P_o = 38 \text{ mW}$ , see also "Output power Po for transmitters of ABB" on page 24.

$$\Delta t = 200 \text{ K/W} \times 0.038 \text{ W} = 7.6 \text{ K}$$

Therefore, at transmitter output power  $P_o = 38 \text{ mW}$ , the temperature rise in the event of a fault is approximately 8 K. This results in the following maximum possible process temperatures  $T_{medium}$ , as shown in the table "Maximum process temperature Tmedium in Zone 0:" on page 24 .

### Intrinsic safety ATEX "Ex i"

Suitable thermowells in accordance with PTB 01 ATEX 2200 X are to be used.

In the area of the electrical connections, the permissible ambient temperature range is -40 ... 80° C (-40 ... 176 °F).

# SensyTemp TSP111, TSP121, TSP131 Temperature sensors

## Electrical power limit Ex i

All of the values listed below are valid assuming that an additional transmitter has been connected. The following electrical values must not be exceeded:

$U_i$ (input voltage)	$I_i$ (input current)
30 V	101 mA
25 V	158 mA
20 V	309 mA

$P_i$  (internal power) = max. 0.5 W  
Note: The internal power  $P_i$  corresponds to the output power  $P_o$  of the connected transmitter.  
 $L_i$  (internal inductance) = 15  $\mu$ H/m  
 $C_i$  (internal capacitance) = 280 pF/m

## Output power $P_o$ for transmitters of ABB

Transmitter type	$P_o$
TTH200 HART	≤ 38 mW
TTH300 HART	≤ 38 mW
TTH300 PA	≤ 38 mW
TTH300 FF	≤ 38 mW

All other information required to prove intrinsic safety ( $U_o$ ,  $I_o$ ,  $P_o$ ,  $L_o$ ,  $C_o$  etc.) can be taken from the type examination certificates for the relevant transmitter models.

## Maximum process temperature $T_{medium}$ in Zone 0:

The surface temperature of Category 1 devices must not exceed 80 % of the ignition temperature of a flammable gas or liquid. For the temperature  $T_{medium}$ , the temperature increase of 8 K in case of fault calculated as an example in chapter "Conditions for the use in potentially explosive areas" on page 23 is considered here.

Temperature class	80 % of the ignition temperature	$T_{medium}$
T1 (450 °C (842 °F))	360 °C (680 °F)	352 °C (665.5 °F)
T2 (300 °C (572 °F))	240 °C (464 °F)	232 °C (449.6 °F)
T3 (200 °C (392 °F))	160 °C (320 °F)	152 °C (305.6 °F)
T4 (135 °C (275 °F))	108 °C (226.4 °F)	100 °C (212 °F)
T5 (100 °C (212 °F))	80 °C (176 °F)	72 °C (161.6 °F)
T6 (85 °C (185 °F))	68 °C (154.4 °F)	60 °C (140 °F)

## Maximum process temperature $T_{medium}$ in Zone 1:

To calculate the temperature classes for T3, T4, T5 and T6, 5 K in each instance must be deducted; for T1 and T2, 10 K in each instance must be deducted.

Temperature class	-5 K	-10 K	$T_{medium}$
T1 (450 °C (842 °F))	–	440 °C (824 °F)	432 °C (809.6 °F)
T2 (300 °C (572 °F))	–	290 °C (554 °F)	282 °C (539.6 °F)
T3 (200 °C (392 °F))	195 °C (383 °F)	–	187 °C (368.6 °F)
T4 (135 °C (275 °F))	130 °C (266 °F)	–	122 °C (251.6 °F)
T5 (100 °C (212 °F))	95 °C (203 °F)	–	87 °C (188.6 °F)
T6 (85 °C (185 °F))	80 °C (176 °F)	–	72 °C (161.6 °F)

## Non-sparking and dust explosion protection

External measures must be made for the power supply circuit in order to prevent the rated voltage from being exceeded by more than 40% in the event of transient disturbances.

The ambient temperature depends on the process temperature. The lower limit is -40 °C (-40 °F). The upper limit of the ambient temperature is presented in the following table:

Process temperature	Extension tube 150 mm	Extension tube 250 mm
100 °C (212 °F)	65 °C (149 °F)	70 °C (158 °F)
200 °C (392 °F)	60 °C (140 °F)	70 °C (158 °F)
300 °C (572 °F)	60 °C (140 °F)	70 °C (158 °F)
400 °C (752 °F)	55 °C (131 °F)	65 °C (149 °F)

For integrated TTH200 or TTH300 transmitters and the T6 temperature class, the maximum permissible ambient temperature is 56 °C (132.8 °F).

Process temperature:  
max. 400 °C (752 °F) for II 3G  
max. 300 °C (572 °F) for II 3D

## Tests and certificates

To increase the safety and accuracy of your process, ABB provides a number of mechanical and electrical tests. The results of these tests are certified in accordance with EN 10204.

The following certificates are issued:

- Declaration of compliance 2.1 for order conformity
- Test report 2.2 for the following tests:
  - Material of wetted parts
  - Batch values of the thermocouple
  - Insulation resistance measurement at room temperature
- Inspection certificate 3.1 for the following tests:
  - Material confirmation for wetted parts
  - Visual, dimensional and function checks of temperature sensor
  - Helium leak test for thermowell
  - X-ray inspection of thermowell for bore hole concentricity on request
  - X-ray inspection of weld seams
  - Ultrasonic test for bore hole concentricity
  - Dye penetration test at the weld seams of the thermowell
  - Compression test of thermowell
  - Measuring inset reference measurement
- Inspection certificate 3.2 available on request

For measurements requiring extremely high accuracy, ABB can calibrate the temperature sensor in its own DAkkS-calibration lab.

When DAkkS- calibration is performed, a separate certificate is provided for each temperature sensor.

Reference measurements and DAkkS calibrations are performed on the measuring inset, together with a transmitter if necessary.

To obtain accurate measurements, observe the minimum length for the measuring inset's mineral insulated cable:

- In very low temperatures (< -70° C (-94 °F)): 300 mm
  - In low to medium temperatures: 100 ... 150 mm
  - In temperatures over 500 °C (932 °F): 300 ... 400 mm
- Longer lengths allow additional measurement methods and simplify the measuring process. If you require any further information, please contact your local ABB partner.

For reference measurements and DAkkS-calibration, the individual characteristic of the temperature sensor can also be calculated and a suitable transmitter can be programmed based on a freestyle characteristic. Adjusting the transmitter to the sensor characteristic can considerably improve the measuring accuracy of the temperature sensor. The measurement must be taken with at least three temperatures.

# SensyTemp TSP111, TSP121, TSP131 Temperature sensors

## Ordering Information

### IMPORTANT (NOTICE)

Order codes cannot be combined at will. Your ABB partner will be happy to answer any questions you might have regarding installation feasibility. All documentation, declarations of conformity, and certificates are available in ABB's download area.

### Main ordering information SensyTemp TSP111

Base model	TSP111	XX											
SensyTemp TSP111 Temperature Sensor, without thermowell, for light and medium duty applications													
<b>Explosion Protection / Approvals</b>													
Without			Y0										
Intrinsic Safety ATEX II 1 G Ex ia IIC T6 Ga or II 2 G Ex ib IIC T6 Gb or II 1/2 G Ex ib IIC T6 Ga/Gb			A1										
Non incendive ATEX II 3 G Ex nA IIC T1 - T6 Gc and ATEX II 3 D Ex tc IIIB T133°C Dc	1)	B1											
Intrinsic safety IECEx ia IIC T6 Ga		H1											
Intrinsic Safety IECEx ib IIC T6 Gb or IECEx ib IIC T6 Ga/Gb		H2											
Intrinsic Safety acc. NAMUR NE 24 and ATEX II 1 G Ex ia IIC T6 Ga		N1											
GOST Russia - metrological approval		G1											
GOST Russia - metrological approval and EAC-Ex, Ex i - Zone 0		P2											
GOST Kazakhstan - metrological approval		G3											
GOST Kazakhstan - metrological approval and EAC-Ex, Ex i - Zone 0		T2											
GOST Belarus - metrological approval		M5											
GOST Belarus - metrological approval and EAC-Ex, Ex i - Zone 0		U2											
<b>Extension Tube Length</b>													
Without Extension Tube			Y0										
K = 150 mm (6 in.)			K1										
Customer specific length			Z9										

Continued see next page

Main ordering information SensyTemp TSP111	XX						
<b>Thermowell Connection</b>							
No extension / Connection head with thread M24 x 1,5	W1						
No extension / Connection head with thread 1/2 in. NPT	W2						
No extension / Connection head with lock nut M24 x 1,5	W3						
Double nipple / G 1/2 A / G 1/2 A	W4						
Double nipple / 1/2 in. NPT / 1/2 in. NPT	W5						
Extension tube with Cylindrical thread G 1/2 A	G1						
Extension tube with Cylindrical thread G 3/4 A	G2						
Extension tube with Cylindrical thread G 3/8 A	G3						
Extension tube with Cylindrical thread M14 x 1,5	M1						
Extension tube with Cylindrical thread M18 x 1,5	M2						
Extension tube with Cylindrical thread M20 x 1,5	M3						
Extension tube with Cylindrical thread M24 x 1,5	M4						
Extension tube with Cylindrical thread M27 x 2	M5						
Extension tube with conical thread 1/2 in. NPT	N1						
Nipple / 1/2 in. NPT / 1/2 in. NPT	N2						
Nipple-Union / 1/2 in. NPT / Union 1/2 in. NPT	N3						
Nipple - Union - Nipple / 1/2 in. NPT / 1/2 in. NPT	N4						
Extension tube / Gland nut M24 x 1.5 / Union G 1/2 A	U1						
Extension tube / Gland nut M24 x 1.5 / Union G 3/4 A	U2						
Extension tube / Gland nut M24 x 1.5 / Union G 1 A	U3						
Extension tube / Gland nut M24 x 1.5 / Union M20 x 1.5	U4						
Extension tube / Gland nut M24 x 1.5 / Union M27 x 2	U5						
Extension with Male nut, thread G 1/2 in.	U6						
Extension tube with adjustable compression fitting G 1/2 A	A1						
Extension tube with adjustable compression fitting 1/2 in. NPT	A2						
Others	Z9						
<b>Immersion Length</b>							
U = 140 mm (5.6 in.)	U2						
U = 200 mm (8 in.)	U4						
U = 260 mm (10.3 in.)	U6						
Customer specific length	Z9						

# SensyTemp TSP111, TSP121, TSP131

## Temperature sensors

Main ordering information SensyTemp TSP111	XX	XX	XX	XX	XX	XX
<b>Measuring Inset Type</b>						
RTD, TF, Basic application, measuring range -50 ... 400 °C (-58 ... 752 °F), 10 g	S1					
RTD, TF, Extended vibration resistance, measuring range -50 ... 400 °C (-58 ... 752 °F), 60 g	S2					
RTD, TF, Extended measuring range -196 ... 400 °C (-321 ... 752 °F), 10 g	S3					
RTD, TF, Extended vibration resistance, extendend measuring range -196 ... 400 °C (-321 ... 752 °F), 60 g	S4					
RTD, WW, Extended measuring range -196 ... 600 °C (-321 ... 1112 °F), 10 g	D1					
RTD, WW, Extended vibration resistance, extendend measuring range -196 ... 600 °C (-321 ... 1112 °F), 60 g	D3					
RTD, adjustable to German calibration regulations, sign of app. 000/308 - without calibration	E1					
RTD, custody preliminary, adjustable to German calibration regulations, sign of app. 000/308 - with calibration -10 °C and +50 °C	E2					
Thermocouple	T1					
Others	Z9					
<b>Measuring Inset Diameter</b>						
3 mm	D3					
4.5 mm	D4					
6 mm	D6					
8 mm	D8					
8 mm, tip with sleeve, DIN 43735 Sleeve 80 mm (RTD), 20 mm (TC)	H8					
10 mm, tip with sleeve Sleeve 80 mm (RTD), 20 mm (TC)	H1					
Others	Z9					
<b>Sensor Type and Wiring</b>						
1 x Pt100, 2-wire	P1					
1 x Pt100, 3-wire	P2					
1 x Pt100, 4-wire	P3					
2 x Pt100, 2-wire	P4					
2 x Pt100, 3-wire	P5					
2 x Pt100, 4-wire	P6					
1 x Pt1000, 2-wire	P8					
1 x Pt1000, 3-wire	P7					
1 x Pt1000, 4-wire	P9					
1 x Type K (NiCr-NiAl)	K1					
2 x Type K (NiCr-NiAl)	K2					
3 x Type K (NiCr-NiAl)	K3					
1 x Type J (Fe-CuNi)	J1					
2 x Type J (Fe-CuNi)	J2					
1 x Type L (Fe-CuNi)	L1					
2 x Type L (Fe-CuNi)	L2					
1 x Type N (NiCrSi-NiSi)	N1					
2 x Type N (NiCrSi-NiSi)	N2					
1 x Type T (Cu-CuNi)	T1					
2 x Type T (Cu-CuNi)	T2					
1 x Type E (NiCr-CuNi)	E1					
2 x Type E (NiCr-CuNi)	E2					
1 x Type S (Pt10Rh-Pt)	S1					
2 x Type S (Pt10Rh-Pt)	S2					
Others	Z9					

Continued see next  
page

Main ordering information SensyTemp TSP111	XX	XX	XX
<b>Sensor Accuracy</b>			
Accuracy Class B, IEC 60751	B2		
Wire Wound, Double, Accuracy Class A, IEC 60751, Range 0 ... 250 °C (32 ... 482 °F)	D2		
Wire Wound, Accuracy Class A, IEC 60751, Range -100 ... 450 °C (-148 ... 842 °F)	D1		
Thin Film, Accuracy Class A, IEC 60751, Range -30 ... 300 °C (-22 ... 572 °F)	S1		
Thin Film, Accuracy Class AA, IEC 60751, Range 0 ... 100 °C (0 ... 212 °F)	S3		
Thin Film, Accuracy Class A extended according to IEC 60751, Range -196 ... 400 °C (-320,8 ... 752 °F)	S6		
Thin Film, Accuracy Class AA extended according to IEC 60751, Range -196 ... 400 °C (-320,8 ... 752 °F)	S8		
Thermocouple, Accuracy Class 2, IEC 60584	T2		
Thermocouple, Accuracy Class 1, IEC 60584	T1		
Thermocouple, Standard Accuracy ANSI MC96.1	T4		
Thermocouple, Special Accuracy ANSI MC96.1	T3		
Thermocouple, Accuracy according to DIN 43710	T5		
Others	Z9		
<b>Connection Head Type / Material</b>			
BUZ / Aluminum, flat cover, hinged	B1		
BUZH / Aluminum, high cover, hinged	B2		
BUZHD / Aluminium, high cover with display, hinged	B3		
BUKH / Polyamide, high cover, hinged	K1		
BEG / Stainless steel, screwed cover	E1		
BUS / Aluminium, hinged cover with snap lock	B4		
BUSH / Aluminium, high cover, hinged with snap lock	B5		
BBK / Polyamid, screwed cover	K2		
B / Aluminum, cover held on with screws	B6		
BH / Aluminium, high cover	B7		
BUG / Cast iron, hinged cover	G1		
Others	Z9		
<b>Transmitter</b>			
Without transmitter, sensor with ceramic terminal block - spring loaded	Y1		
Without transmitter, sensor with flying leads and metal plate - spring loaded	Y2		
TTH300-HART, programmable, output signal 4 ... 20 mA, dual input	H4		
TTH300-HART, Ex version, programmable, output signal 4 ... 20 mA, dual input	H5		
TTH300-PA, programmable, output PROFIBUS PA, dual input	P6		
TTH300-PA, Ex version, programmable, output PROFIBUS PA, dual input	P7		
TTH300-FF, programmable, output FOUNDATION fieldbus H1, dual input	F6		
TTH300-FF, Ex version, programmable, output FOUNDATION fieldbus H1, dual input	F7		
TTH200-HART, programmable, output signal 4 ... 20 mA	H6		
TTH200-HART, Ex version, programmable, output signal 4 ... 20 mA	H7		

# SensyTemp TSP111, TSP121, TSP131

## Temperature sensors

### Additional ordering information SensyTemp TSP111

	XX	XX	XX	XX
<b>Transmitter Measuring Range</b>				
Standard measuring range	A0			
Customer-specific measuring range	AZ			
<b>Certificates</b>				
Declaration of compliance according EN 10204-2.1, with the order	C4			
Test report according EN 10204-2.2 for batch values, MIC-TC	C5			
Test report according EN 10204-2.2 for measuring of insulation resistance at ambient temperature	CN			
Inspection certificate according EN 10204-3.1, visual, dimensional and functional test	C6			
Inspection certificate according EN 10204-3.1, helium leakage test	C7			
Inspection certificate according EN 10204-3.1, sensor tolerance	CC			
TÜV certificate for functional safety SIL2 IEC 61508 for sensor with integrated transmitter, HART	CS			
Inspection certificate according EN 10204-3.1, sensor calibration, single RTD	CD			
Inspection certificate according EN 10204-3.1, sensor calibration, double RTD	CE			
Inspection certificate according EN 10204-3.1, sensor calibration, single thermocouple	CF			
Inspection certificate according EN 10204-3.1, sensor calibration, double thermocouple	CG			
DAkkS sensor calibration, single RTD, calibration certificate per thermometer	CH			
DAkkS sensor calibration, double RTD, calibration certificate per thermometer	CJ			
DAkkS sensor calibration, single thermocouple, calibration certificate per thermometer	CK			
DAkkS sensor calibration, double thermocouple, calibration certificate per thermometer	CL			
Others	CZ			
<b>Number of Calibration Test Points</b>				
1 point	P1			
2 points	P2			
3 points	P3			
4 points	P4			
5 points	P5			
<b>Temperatures for Sensor Calibration</b>				
Standard calibration: 0 °C (32 °F)	V1			
Standard calibration: 100 °C (212 °F)	V2			
Standard calibration: 400 °C (752 °F)	V3			
Standard calibration: 0 °C and 100 °C (32 °F and 212 °F)	V4			
Standard calibration: 0 °C and 400 °C (32 °F and 752 °F)	V5			
Standard calibration: 0 °C, 100 °C and 200 °C (32 °F, 212 °F and 392 °F)	V7			
Standard calibration: 0 °C, 200 °C and 400 °C (32 °F, 392 °F and 752 °F)	V8			
Standard calibration: Customer specific temperatures	V6			
DAkkS calibration: 0 °C (32 °F)	D1			
DAkkS calibration: 100 °C (212 °F)	D2			
DAkkS calibration: 400 °C (752 °F)	D3			
DAkkS calibration: 0 °C and 100 °C (32 °F and 212 °F)	D4			
DAkkS calibration: 0 °C and 400 °C (32 °F and 752 °F)	D5			
DAkkS calibration: 0 °C, 100 °C and 200 °C (32 °F, 212 °F and 392 °F)	D7			
DAkkS calibration: 0 °C, 200 °C and 400 °C (32 °F, 392 °F and 752 °F)	D8			
DAkkS calibration: Customer specific temperatures	D6			

<b>Additional ordering information SensyTemp TSP111</b>		<b>XX</b>						
<b>Extension Tube Diameter Options</b>								
Extension Diameter 14,0 mm		N1						
Extension Diameter 11,0 mm		N2						
<b>Extension Tube Options</b>								
Extension tube welded with measuring inset, gas tight			N3					
Extension tube oil tight up to 3bar			N4					
Mounting bracket			N5					
<b>Threaded Connection Options</b>								
Adjustable compression fitting G 1/4, stainless steel material			K1					
Adjustable compression fitting G 1/4, stainless steel material, olive material PTFE			K2					
Adjustable compression fitting G 1/2, stainless steel material			K3					
Adjustable compression fitting G 1/2, stainless steel material, olive material PTFE			K4					
Adjustable compression fitting M18 x 1,5, stainless steel material			K5					
Adjustable compression fitting 1/2 in. NPT, stainless steel material			K6					
Adjustable compression fitting 1/2 in. NPT, stainless steel material, olive material PTFE			K7					
Spring loaded adjustable compression fitting G 1/2 , stainless steel material			K8					
Spring loaded adjustable compression fitting M18 x 1,5, stainless steel material			K9					
Others			KZ					
<b>Measuring Inset: Option</b>								
Hot junction grounded			J1					
2 insets paired from 0 ... 100 °C (32 ... 212 °F), max. deviation 0.1 K			J3					
Upgrading Sensor Accuracy to Cl. A, 0 ... 600°C			J7					
Improvement Sensor Accuracy to 0.5 Cl. A, 0 ... 100°C, U>100 mm			J8					
Improvement Sensor Accuracy to 0.5 Cl. A, 0 ... 400°C, U>250 mm			J9					
<b>Measuring Inset: Transmitter Mounted</b>								
Transmitter mounted on inset, without ceramic block			J2					
<b>Measuring Inset: Other Options</b>								
Others			JZ					
<b>Connection Head Options</b>								
Second transmitter mounted in connection head (same type as first one)			H1					
Connection head seawater-resistant, painted grey-white			H3					
Others			HZ					

# SensyTemp TSP111, TSP121, TSP131

## Temperature sensors

Additional ordering information SensyTemp TSP111	XX	XX	XX	XX	XX	XX
<b>Cable Entry Options</b>						
1 x M20 x 1.5, without cable gland	U1					
1 x 1/2 in. NPT, without cable gland	U2					
1 x 3/4 in. NPT, without cable gland	U3					
2 x M20 x 1.5, without cable gland	U4					
2x M20 x 1.5, with cable gland skintop, temperature range -40 bis +70 °C (-40 bis +158 °F), cable diameter 5,5 ... 13 mm (0,22 ... 0,51 inch)	U7					
Harting Han 7D plug and socket connection	UG					
Harting Han 8D (8U) plug and socket connection	UH					
M12 plug for PROFIBUS PA	UJ					
7/8 in. plug for FOUNDATION fieldbus	UK					
Others	UZ					
<b>Display Type</b>						
LCD indicator type AS		L1				
Configurable LCD Indicator type A			L2			
<b>Other Options</b>						
Thermometer silicone-free				PS		
With fastened gasket				PD		
Earth screw external				PG		
Each Thermometer single packed - Polyethylen				PN		
<b>Documentation Language</b>						
German					M1	
English					M5	
Language package Western Europe / Scandinavia (Languages: DA, ES, FR, IT, NL, PT, FI, SV)					MW	
Language package Eastern Europe (Languages: EL, CS, ET, LV, LT, HU, HR, PL, SK, SL, RO, BG)					ME	
<b>Additional TAG Plate</b>						
Stainless steel plate with TAG no.						T1
<b>Additional Identification Plate</b>						
Stainless steel plate with customer specific text					T2	
Adhesive label					T3	

1) According EN 60079-0 and EN 61241-0, the application in hybrid mixtures (concomitance of potentially explosive dust and gas) is currently not allowed.

## Main ordering information SensyTemp TSP121

<b>Base model</b>	<b>TSP121</b>	<b>XX</b>	<b>XX</b>	<b>XX</b>	<b>XXX</b>	<b>XX</b>								
SensyTemp TSP121 Temperature Sensor, with tubular thermowell, for light and medium duty applications														
<b>Continued see next page</b>														
<b>Explosion Protection / Approvals</b>														
Without		Y0												
Intrinsic Safety ATEX II 1 G Ex ia IIC T6 Ga or II 2 G Ex ib IIC T6 Gb or II 1/2 G Ex ib IIC T6 Ga/Gb			A1											
Non incendive ATEX II 3 G Ex nA IIC T1 - T6 Gc and ATEX II 3 D Ex tc IIIB T133°C Dc	1)	B1												
Intrinsic safety IECEx ia IIC T6 Ga		H1												
Intrinsic Safety IECEx ib IIC T6 Gb or IECEx ib IIC T6 Ga/Gb		H2												
Intrinsic Safety acc. NAMUR NE 24 and ATEX II 1 G Ex ia IIC T6 Ga		N1												
GOST Russia - metrological approval		G1												
GOST Russia - metrological approval and EAC-Ex, Ex i - Zone 0		P2												
GOST Kazakhstan - metrological approval		G3												
GOST Kazakhstan - metrological approval and EAC-Ex, Ex i - Zone 0		T2												
GOST Belarus - metrological approval		M5												
GOST Belarus - metrological approval and EAC-Ex, Ex i - Zone 0		U2												

# SensyTemp TSP111, TSP121, TSP131

## Temperature sensors

Main ordering information SensyTemp TSP121	XX	XX	XXX	XX								
<b>Wetted Thermowell Material</b>												
Stainless Steel ASTM 316L (1.4404)	S1											
Stainless Steel ASTM 316Ti (1.4571)	S2											
Highly heat-resistant stainless steel ASTM A446-1 (1.4749)	H1											
Heat Resistant Steel 1.4762	H2											
Heat resistant steel ASTM A314 (CrNi, 1.4841)	H3											
Duplex stainless steel (CrNi, 1.4462)	S9											
Stainless steel ASTM 904L (CrNi, 1.4539); (Uranus B6)	S4											
Ni-Alloy Hastelloy C-276 (2.4819)	N1											
Ni-Alloy Hastelloy C-4 (2.4610)	N2											
Highly heat-resistant stainless steel , Ni-Alloy Inconel 600 (2.4816)	N5											
Others	Z9											
<b>Thermowell Type</b>												
Tubular thermowell with straight shaft (DIN 43772, Form 2)	A1											
Flanged tubular thermowell with straight shaft (DIN 43772, Form 2F)	A2											
Screwed tubular thermowell with straight shaft (DIN 43772, Form 2G)	A3											
Tubular thermowell, stepped tip (ABB Form 2S)	B1											
Flanged tubular thermowell, stepped tip (ABB Form 2FS)	B2											
Screwed tubular thermowell, stepped tip (ABB Form 2GS)	B3											
Tubular thermowell, tapered (DIN 43772, Form 3)	C1											
Flanged tubular thermowell, tapered (DIN 43772, Form 3F)	C2											
Screwed tubular thermowell, tapered (DIN 43772, Form 3G)	C3											
Screwed tubular thermowell without extension, straight shaft (ABB Form 2G0)	A4											
Screwed tubular thermowell without extension, stepped tip (ABB Form 2GS0)	B4											
Tubular thermowell d= 22mm, stepped tip d= 6mm	B5											
Tubular thermowell, stepped tip 9 mm (0.36 in.) (ABB Form 2S/9)	K1											
Flanged tubular thermowell, stepped tip 9 mm (0.36 in.) (ABB Form 2FS/9)	K2											
Screwed tubular thermowell, stepped tip 9 mm (0.36 in.) (ABB Form 2GS/9)	K3											
Others	Z9											

Continued see next page

Main ordering information SensyTemp TSP121	XXX	XX						
<b>Process Connection</b>								
Without process connection	Y00							
Adjustable compression fitting G 1/2, stainless steel	A01							
Adjustable compression fitting 1/2 in. NPT, stainless steel	A02							
Adjustable flange DN 25 PN 10 ... PN 40, EN 1092-1	A03							
Adjustable flange 1 in. 150 lbs, ASME B16.5	A07							
Flange DN 15 PN 10 ... PN 40, EN 1092-1	F01							
Flange DN 20 PN 10 ... PN 40, EN 1092-1	F02							
Flange DN 25 PN 10 ... PN 40, EN 1092-1	F03							
Flange DN 25 PN 63 ... PN100, EN 1092-1	F29							
Flange DN 32 PN 16 ... PN 40, EN 1092-1	F30							
Flange DN 40 PN 10 ... PN 40, EN 1092-1	F04							
Flange DN 40 PN 63 ... PN 100, EN 1092-1	F37							
Flange DN 50 PN 6, EN 1092-1	F06							
Flange DN 50 PN 10 ... PN 40, EN 1092-1	F05							
Flange DN 50 PN 63, EN 1092-1	F33							
Flange DN 50 PN 100, EN 1092-1	F34							
Flange DN 80 PN 16, EN 1092-1	F35							
Flange DN 100 PN 40, EN 1092-1	F36							
Flange 1 in. 150 lbs, ASME B16.5	F07							
Flange 1 in. 300 lbs, ASME B16.5	F08							
Flange 1 in. 600 lbs, ASME B16.5	F09							
Flange 1-1/2 in. 150 lbs, ASME B16.5	F11							
Flange 1-1/2 in. 300 lbs, ASME B16.5	F12							
Flange 1-1/2 in. 600 lbs, ASME B16.5	F13							
Flange 1-1/2 in. 900 / 1500 lbs, ASME B16.5	F14							
Flange 2 in. 150 lbs, ASME B16.5	F15							
Flange 2 in. 300 lbs, ASME B16.5	F16							
Flange 2 in. 600 lbs, ASME B16.5	F17							
Flange 2 in. 900 / 1500 lbs, ASME B16.5	F18							
Cylindrical thread G 3/8 A	S15							
Cylindrical thread G 1/2 A	S01							
Cylindrical thread G 3/4 A	S02							
Cylindrical thread G 1 A	S03							
Cylindrical thread M20 x 1.5	S07							
Cylindrical thread M27 x 2	S08							
Conical thread 1/2 in. NPT	S04							
Conical thread 3/4 in. NPT	S05							
Conical thread 1 in. NPT	S06							
Conical thread 1/2 in. BSPT	S09							
Conical thread 3/4 in. BSPT	S10							
Conical thread 1 in. BSPT	S11							
Others	Z99							

# SensyTemp TSP111, TSP121, TSP131

## Temperature sensors

Main ordering information SensyTemp TSP121	XX							
<b>Thermowell Diameter</b>								
6 mm x 1 mm	A9							
8 mm x 2 mm	A5							
9 mm x 1 mm	A1							
10 mm x 1,5 mm	A6							
11 mm x 2 mm	A2							
12 mm x 2,5 mm	A3							
13,5 mm x 2,3 mm	B6							
13,7 mm x 2,24 mm	B2							
14 mm x 2,5 mm	A4							
15 mm x 2 mm	A7							
16 mm x 3 mm	A8							
22 mm x 2 mm	B1							
<b>Immersion Length</b>								
Without fixed immersion length	Y0							
U = 100 mm (4 in.)	U1							
U = 160 mm (6.3 in.)	U3							
U = 250 mm (10 in.)	U5							
U = 400 mm (16 in.)	U7							
Customer specific length	Z9							
<b>Nominal Length</b>								
N = 230 mm (9.1 in.)	N1							
N = 290 mm (11.42 in.)	N3							
N = 380 mm (15 in.)	N5							
N = 530 mm (20.9 in.)	N7							
Customer specific length	Z9							
<b>Measuring Inset Type</b>								
Without measuring inset	Y0							
RTD, TF, Basic application, measuring range -50 ... 400 °C (-58 ... 752 °F), 10 g	S1							
RTD, TF, Extended vibration resistance, measuring range -50 ... 400 °C (-58 ... 752 °F), 60 g	S2							
RTD, TF, Extended measuring range -196 ... 400 °C (-321 ... 752 °F), 10 g	S3							
RTD, TF, Extended vibration resistance, extendend measuring range -196 ... 400 °C (-321 ... 752 °F), 60 g	S4							
RTD, WW, Extended measuring range -196 ... 600 °C (-321 ... 1112 °F), 10 g	D1							
RTD, WW, Extended vibration resistance, extendend measuring range -196 ... 600 °C (-321 ... 1112 °F), 60 g	D3							
RTD, adjustable to German calibration regulations, sign of app. 000/308 - without calibration	E1							
RTD, custody preliminary, adjustable to German calibration regulations, sign of app. 000/308 - with calibration -10 °C and +50 °C	E2							
Thermocouple	T1							
Others	Z9							

Main ordering information SensyTemp TSP121	XX	XX	XX	XX
<b>Sensor Type and Wiring</b>				
Without measuring inset	Y0			
1 x Pt100, 2-wire	P1			
1 x Pt100, 3-wire	P2			
1 x Pt100, 4-wire	P3			
2 x Pt100, 2-wire	P4			
2 x Pt100, 3-wire	P5			
2 x Pt100, 4-wire	P6			
1 x Pt1000, 2-wire	P8			
1 x Pt1000, 3-wire	P7			
1 x Pt1000, 4-wire	P9			
1 x Type K (NiCr-NiAl)	K1			
2 x Type K (NiCr-NiAl)	K2			
3 x Type K (NiCr-NiAl)	K3			
1 x Type J (Fe-CuNi)	J1			
2 x Type J (Fe-CuNi)	J2			
1 x Type L (Fe-CuNi)	L1			
2 x Type L (Fe-CuNi)	L2			
1 x Type N (NiCrSi-NiSi)	N1			
2 x Type N (NiCrSi-NiSi)	N2			
1 x Type T (Cu-CuNi)	T1			
2 x Type T (Cu-CuNi)	T2			
1 x Type E (NiCr-CuNi)	E1			
2 x Type E (NiCr-CuNi)	E2			
1 x Type S (Pt10Rh-Pt)	S1			
2 x Type S (Pt10Rh-Pt)	S2			
Others	Z9			

# SensyTemp TSP111, TSP121, TSP131

## Temperature sensors

Main ordering information SensyTemp TSP121	XX	XX	XX
<b>Sensor Accuracy it</b>			
Without measuring inset	Y0		
Accuracy Class B, IEC 60751	B2		
Wire Wound, Double, Accuracy Class A, IEC 60751, Range 0 ... 250 °C (32 ... 482 °F)	D2		
Wire Wound, Accuracy Class A, IEC 60751, Range -100 ... 450 °C (-148 ... 842 °F)	D1		
Thin Film, Accuracy Class A, IEC 60751, Range -30 ... 300 °C (-22 ... 572 °F)	S1		
Thin Film, Accuracy Class AA, IEC 60751, Range 0 ... 100 °C (0 ... 212 °F)	S3		
Thin Film, Accuracy Class A extended according to IEC 60751, Range -196 ... 400 °C (-320,8 ... 752 °F)	S6		
Thin Film, Accuracy Class AA extended according to IEC 60751, Range -196 ... 400 °C (-320,8 ... 752 °F)	S8		
Thermocouple, Accuracy Class 2, IEC 60584	T2		
Thermocouple, Accuracy Class 1, IEC 60584	T1		
Thermocouple, Standard Accuracy ANSI MC96.1	T4		
Thermocouple, Special Accuracy ANSI MC96.1	T3		
Thermocouple, Accuracy according to DIN 43710	T5		
Others	Z9		
<b>Connection Head Type / Material</b>			
BUZ / Aluminum, flat cover, hinged	B1		
BUZH / Aluminum, high cover, hinged	B2		
BUZHD / Aluminium, high cover with display, hinged	B3		
BUKH / Polyamide, high cover, hinged	K1		
BEG / Stainless steel, screwed cover	E1		
BUS / Aluminium, hinged cover with snap lock	B4		
BUSH / Aluminium, high cover, hinged with snap lock	B5		
BBK / Polyamid, screwed cover	K2		
B / Aluminum, cover held on with screws	B6		
BH / Aluminium, high cover	B7		
BUG / Cast iron, hinged cover	G1		
Others	Z9		
<b>Transmitter</b>			
Without transmitter, sensor with ceramic terminal block - spring loaded	Y1		
Without transmitter, sensor with flying leads and metal plate - spring loaded	Y2		
TTH300-HART, programmable, output signal 4 ... 20 mA, dual input	H4		
TTH300-HART, Ex version, programmable, output signal 4 ... 20 mA, dual input	H5		
TTH300-PA, programmable, output PROFIBUS PA, dual input	P6		
TTH300-PA, Ex version, programmable, output PROFIBUS PA, dual input	P7		
TTH300-FF, programmable, output FOUNDATION fieldbus H1, dual input	F6		
TTH300-FF, Ex version, programmable, output FOUNDATION fieldbus H1, dual input	F7		
TTH200-HART, programmable, output signal 4 ... 20 mA	H6		
TTH200-HART, Ex version, programmable, output signal 4 ... 20 mA	H7		

## Additional ordering information SensyTemp TSP121

		XX	XX	XX
<b>Transmitter Measuring Range</b>				
Standard measuring range		A0		
Customer-specific measuring range		AZ		
<b>Certificates</b>				
Declaration of compliance according EN 10204-2.1, with the order		C4		
Test report according EN 10204-2.2, material monitoring for wetted parts		C1		
Test report according EN 10204-2.2 for batch values, MIC-TC		C5		
Test report according EN 10204-2.2 for measuring of insulation resistance at ambient temperature		CN		
Inspection certificate according EN 10204-3.1, material monitoring for wetted parts		C2		
Inspection certificate according EN 10204-3.1, visual, dimensional and functional test		C6		
Inspection certificate according EN 10204-3.1, helium leakage test		C7		
Inspection certificate according EN 10204-3.1, dye penetration test		C9		
Inspection certificate according EN 10204-3.1, pressure test on thermowell		CB		
Inspection certificate according EN 10204-3.1, sensor tolerance		CC		
TÜV certificate for functional safety SIL2 IEC 61508 for sensor with integrated transmitter, HART		CS		
Inspection certificate according EN 10204-3.1, sensor calibration, single RTD		CD		
Inspection certificate according EN 10204-3.1, sensor calibration, double RTD		CE		
Inspection certificate according EN 10204-3.1, sensor calibration, single thermocouple		CF		
Inspection certificate according EN 10204-3.1, sensor calibration, double thermocouple		CG		
DAkkS sensor calibration, single RTD, calibration certificate per thermometer		CH		
DAkkS sensor calibration, double RTD, calibration certificate per thermometer		CJ		
DAkkS sensor calibration, single thermocouple, calibration certificate per thermometer		CK		
DAkkS sensor calibration, double thermocouple, calibration certificate per thermometer		CL		
Inspection certificate according EN 10204-3.1, x-ray- test for weldings		CU		
Others		CZ		
<b>Number of Calibration Test Points</b>				
1 point		P1		
2 points		P2		
3 points		P3		
4 points		P4		
5 points		P5		

# SensyTemp TSP111, TSP121, TSP131

## Temperature sensors

Additional ordering information SensyTemp TSP121	XX	XX	XX
<b>Temperatures for Sensor Calibration</b>			
Standard calibration: 0 °C (32 °F)	V1		
Standard calibration: 100 °C (212 °F)	V2		
Standard calibration: 400 °C (752 °F)	V3		
Standard calibration: 0 °C and 100 °C (32 °F and 212 °F)	V4		
Standard calibration: 0 °C and 400 °C (32 °F and 752 °F)	V5		
Standard calibration: 0 °C, 100 °C and 200 °C (32 °F, 212 °F and 392 °F)	V7		
Standard calibration: 0 °C, 200 °C and 400 °C (32 °F, 392 °F and 752 °F)	V8		
Standard calibration: Customer specific temperatures	V6		
DAkkS calibration: 0 °C (32 °F)	D1		
DAkkS calibration: 100 °C (212 °F)	D2		
DAkkS calibration: 400 °C (752 °F)	D3		
DAkkS calibration: 0 °C and 100 °C (32 °F and 212 °F)	D4		
DAkkS calibration: 0 °C and 400 °C (32 °F and 752 °F)	D5		
DAkkS calibration: 0 °C, 100 °C and 200 °C (32 °F, 212 °F and 392 °F)	D7		
DAkkS calibration: 0 °C, 200 °C and 400 °C (32 °F, 392 °F and 752 °F)	D8		
DAkkS calibration: Customer specific temperatures	D6		
<b>Thermowell Options</b>			
Thermowell stainless steel with additional tantalum sleeve	S1		
Thermowell coated with 0.5 mm (0.02 in.) E-CTFE / Halar, wetted parts incl. flange surface	S2		
Thermowell coated with 0.5 mm (0.02 in.) PFA, wetted parts incl. flange surface	S3		
Thermowell coated with 1 mm (0.04 in.) NiCrB / META 43	2)	S4	
Thermowell coated with 0.5 mm (0.02 in.) NiZrO2 / PL1312	2)	S5	
Thermowell incl. tests and certificates AD-2000 standard for austenitic steel	S6		
Thermowell incl. tests and certificates AD-2000 standard for high temperature steel	S7		
Thermowell clean for oxygen service	S9		
Thermowell stress calculation according Dittrich / Kohler	SD		
Others	SZ		
<b>Flange Connection Options</b>			
Flange raised face form RF, ASME B16.5	F6		
Flange raised face form B1 acc. EN 1092-1	F7		
Flange raised face form B2 acc. EN 1092-1	F8		
Flange facing with tongue form C EN 1092-1	F1		
Flange facing with groove form D acc. EN 1092-1	F2		
Flange facing with RTJ surface acc. ASME B16.5	F3		
Others	FZ		

<b>Additional ordering information SensyTemp TSP121</b>	<b>XX</b>	<b>XX</b>	<b>XX</b>	<b>XX</b>	<b>XX</b>	<b>XX</b>
<b>Extension Tube Options</b>						
Mounting bracket	N5					
<b>Measuring Inset: Option</b>						
Hot junction grounded	J1					
2 insets paired from 0 ... 100 °C (32 ... 212 °F), max. deviation 0.1 K	J3					
Improvement Sensor Accuracy to 0.5 Cl. A, 0 ... 100°C, U>100 mm	J8					
Improvement Sensor Accuracy to 0.5 Cl. A, 0 ... 400°C, U>250 mm	J9					
<b>Measuring Inset: Transmitter Mounted</b>						
Transmitter mounted on inset, without ceramic block	J2					
<b>Measuring Inset: Other Options</b>						
Others	JZ					
<b>Connection Head Options</b>						
Second transmitter mounted in connection head (same type as first one)	H1					
Connection head seawater-resistant, painted grey-white	H3					
Others	HZ					
<b>Cable Entry Options</b>						
1 x M20 x 1.5, without cable gland	U1					
1 x 1/2 in. NPT, without cable gland	U2					
1 x 3/4 in. NPT, without cable gland	U3					
2 x M20 x 1.5, without cable gland	U4					
2x M20 x 1.5, with cable gland skintop, temperature range -40 bis +70 °C (-40 bis +158 °F), cable diameter 5,5 ... 13 mm (0,22 ... 0,51 inch)	U7					
Harting Han 7D plug and socket connection	UG					
Harting Han 8D (8U) plug and socket connection	UH					
M12 plug for PROFIBUS PA	UJ					
7/8 in. plug for FOUNDATION fieldbus	UK					
Others	UZ					

# SensyTemp TSP111, TSP121, TSP131

## Temperature sensors

Additional ordering information SensyTemp TSP121		XX	XX	XX	XX	XX
<b>Display Type</b>						
LCD indicator type AS		L1				
Configurable LCD Indicator type A		L2				
<b>Other Options</b>						
Thermometer silicone-free			PS			
Earth screw external			PG			
Each Thermometer single packed - Polyethylen			PN			
<b>Documentation Language</b>						
German				M1		
English				M5		
Language package Western Europe / Scandinavia (Languages: DA, ES, FR, IT, NL, PT, FI, SV)				MW		
Language package Eastern Europe (Languages: EL, CS, ET, LV, LT, HU, HR, PL, SK, SL, RO, BG)				ME		
<b>Additional TAG Plate</b>						T1
Stainless steel plate with TAG no.						
<b>Additional Identification Plate</b>						
Stainless steel plate with customer specific text						T2
Adhesive label						T3

- 1) According EN 60079-0 and EN 61241-0, the application in hybrid mixtures (concomitance of potentially explosive dust and gas) is currently not allowed  
 2) Specify length from thermowell tip in mm

## Main ordering information SensyTemp TSP131

<b>Base model</b>	TSP131	XX	XX	XX	XXX	XX								
SensyTemp TSP131 Temperature Sensor, with drilled thermowell, for light and medium duty applications														
<b>Explosion Protection / Approvals</b>														
Without		Y0	Continued see next page											
Intrinsic Safety ATEX II 1 G Ex ia IIC T6 Ga or II 2 G Ex ib IIC T6 Gb or II 1/2 G Ex ib IIC T6 Ga/Gb		A1												
Non incendive ATEX II 3 G Ex nA IIC T1 - T6 Gc and ATEX II 3 D Ex tc IIIB T133°C Dc	1)	B1												
Intrinsic safety IECEEx ia IIC T6 Ga		H1												
Intrinsic Safety IECEEx ib IIC T6 Gb or IECEEx ib IIC T6 Ga/Gb		H2												
Intrinsic Safety acc. NAMUR NE 24 and ATEX II 1 G Ex ia IIC T6 Ga		N1												
GOST Russia - metrological approval		G1												
GOST Russia - metrological approval and EAC-Ex, Ex i - Zone 0		P2												
GOST Kazakhstan - metrological approval		G3												
GOST Kazakhstan - metrological approval and EAC-Ex, Ex i - Zone 0		T2												
GOST Belarus - metrological approval		M5												
GOST Belarus - metrological approval and EAC-Ex, Ex i - Zone 0		U2												

# SensyTemp TSP111, TSP121, TSP131

## Temperature sensors

Main ordering information SensyTemp TSP131	XX	XX	XXX	XX									
<b>Wetted Thermowell Material</b>													Continued see next page
Stainless steel ASTM 316L (1.4404)		S1											
Stainless steel ASTM 316Ti (1.4571)		S2											
Heat-resistant stainless steel ASTM A182 F12 (1.7335)		W1											
Heat-resistant stainless steel ASTM A182 F22 (1.7380)		W2											
Heat-resistant stainless steel ASTM A182 F1 (1.5415)		W3											
Highly heat-resistant stainless steel ASTM A347 H (1.4961)		W4											
Highly heat-resistant stainless steel ASTM A446-1 (1.4749)		H1											
Heat resistant steel ASTM A446 (1.4762)		H2											
Heat resistant steel ASTM A314 (CrNi, 1.4841)		H3											
Duplex stainless steel (CrNi, 1.4462)		S9											
Stainless steel ASTM 904L (CrNi, 1.4539); (Uranus B6)		S4											
Ni-Alloy Hastelloy C-276 (2.4819)		N1											
Ni-Alloy Hastelloy C-4 (2.4610)		N2											
NiCu-Alloy Monel 400 (2.4360)		N4											
Ni-Alloy Incoloy 800 (1.4876)		H4											
Highly heat-resistant stainless steel , Ni-Alloy Inconel 600 (2.4816)		N5											
Highly heat-resistant stainless steel ASTM A182 F91 (1.4903)		W5											
Stainless steel ASTM 304 (CrNi, 1.4301)		S5											
Stainless steel ASTM 321 (CrNi, 1.4541)		S6											
Carbon steel ASTM A105 (1.0460)		C1											
Others		Z9											
<b>Thermowell Type</b>													
Weld-in thermowell from bar stock material, diameter F2 = 24 mm (0.95 in.), (DIN 43772, Form 4)			D1										
Weld-in thermowell from bar stock material, diameter F2 = 18 mm (0.71 in.), (DIN 43772, Form 4)			D2										
Flanged thermowell from bar stock material, diameter F2 = 24 mm (0.95 in.), (DIN 43772, Form 4F)			D3										
Flanged thermowell from bar stock material, diameter F2 = 18 mm (0.71 in.), (ABB-Form 4FS)			D4										
Weld-in thermowell from bar stock material, diameter F2 = 26 mm (1.02 in.), (DIN 43772, Form 4)			D5										
Flanged thermowell from bar stock material, diameter F2 = 26 mm (1.02 in.), (DIN 43772, Form 4F)			D6										
Weld-in thermowell from bar stock material, (ABB, Form DR )			R1										
Flanged thermowell from bar stock material, (ABB, Form DRF )			R2										
Weld-in thermowell from bar stock material, ( ABB, Form RD )			R3										
Flanged thermowell from bar stock material, ( ABB, Form RDF )			R4										
Weld-in thermowell from bar stock material, (ABB, Form PW)			P1										
Flanged thermowell from bar stock material, (ABB, Form PF)			P2										
Screwed thermowell from bar stock material, tapered tip, (ABB, Form PS)			P3										
Screwed tubular thermowell from bar stock material, straight shaft (DIN 43772, Form 6)			S1										
Others			Z9										

Main ordering information SensyTemp TSP131	XXX	XX							
<b>Process Connection</b>									
Without process connection	Y00								
Flange DN 25 PN 10 ... PN 40, EN 1092-1	F03								
Flange DN 25 PN 63 ... PN100, EN 1092-1	F29								
Flange DN 32 PN 16 ... PN 40, EN 1092-1	F30								
Flange DN 40 PN 10 ... PN 40, EN 1092-1	F04								
Flange DN 40 PN 63 ... PN 100, EN 1092-1	F37								
Flange DN 50 PN 6, EN 1092-1	F06								
Flange DN 50 PN 10 ... PN 40, EN 1092-1	F05								
Flange DN 50 PN 63, EN 1092-1	F33								
Flange DN 50 PN 100, EN 1092-1	F34								
Flange DN 80 PN 16, EN 1092-1	F35								
Flange DN 100 PN 40, EN 1092-1	F36								
Flange 1 in. 150 lbs, ASME B16.5	F07								
Flange 1 in. 300 lbs, ASME B16.5	F08								
Flange 1 in. 600 lbs, ASME B16.5	F09								
Flange 1-1/2 in. 150 lbs, ASME B16.5	F11								
Flange 1-1/2 in. 300 lbs, ASME B16.5	F12								
Flange 1-1/2 in. 600 lbs, ASME B16.5	F13								
Flange 1-1/2 in. 900 / 1500 lbs, ASME B16.5	F14								
Flange 2 in. 150 lbs, ASME B16.5	F15								
Flange 2 in. 300 lbs, ASME B16.5	F16								
Flange 2 in. 600 lbs, ASME B16.5	F17								
Flange 2 in. 900 / 1500 lbs, ASME B16.5	F18								
Conical thread 1/2 in. NPT	S04								
Conical thread 3/4 in. NPT	S05								
Conical thread 1 in. NPT	S06								
Others	Z99								

Continued see next page

# SensyTemp TSP111, TSP121, TSP131

## Temperature sensors

Main ordering information SensyTemp TSP131	XX									
<b>Extension Tube Length</b>				K1	Z9					
K = 150 mm (6 in.)										
Customer specific length										
<b>Thermowell Connection</b>										
Extension tube with Cylindrical thread G 1/2 A			G1							
Extension tube with Cylindrical thread G 3/4 A			G2							
Extension tube with Cylindrical thread G 3/8 A			G3							
Extension tube with Cylindrical thread M14 x 1,5			M1							
Extension tube with Cylindrical thread M18 x 1,5			M2							
Extension tube with Cylindrical thread M20 x 1,5			M3							
Extension tube with Cylindrical thread M24 x 1,5			M4							
Extension tube with conical thread 1/2 in. NPT			N1							
Nipple / 1/2 in. NPT / 1/2 in. NPT			N2							
Nipple-Union / 1/2 in. NPT / Union 1/2 in. NPT			N3							
Nipple - Union - Nipple / 1/2 in. NPT / 1/2 in. NPT			N4							
Extension with Male nut, thread G 1/2 in.			U6							
Others			Z9							
<b>Immersion Length</b>										
Without fixed immersion length			Y0							
U = 130 mm (5.2 in.)			D1							
U = 190 mm (7.5 in.)			D2							
U = 340 mm (13.4 in.)			D3							
U = 100 mm (4 in.)			P1							
U = 150 mm (6 in.)			P2							
U = 200 mm (8 in.)			P3							
U = 250 mm (10 in.)			P4							
U = 300 mm (12 in.)			P5							
U = 350 mm (14 in.)			P6							
Customer specific length			Z9							

Continued see next page

Main ordering information SensyTemp TSP131	XX	XX	XX	XX	XX	XX
<b>Thermowell Length</b>						
L = 110 mm (4.4 in.), C = 65 mm (2.5 in.)	D1					
L = 115 mm (4.6 in.), C = 40 mm (1.5 in.)	D2					
L = 140 mm (5.6 in.), C = 65 mm (2.5 in.)	D3					
L = 200 mm (8 in.), C = 65 mm (2.5 in.)	D4					
L = 200 mm (8 in.), C = 65 mm (2.5 in.)	D4					
L = 200 mm (8 in.), C = 125 mm (5 in.)	D5					
L = 260 mm (10.3 in.), C = 125 mm (5 in.)	D6					
L = 260 mm (10.3 in.), C = 125 mm (5 in.)	D6					
L = 410 mm (16.2 in.), C = 275 mm (10.9 in.)	D7					
L = 410 mm (16.2 in.), C = 275 mm (10.9 in.)	D7					
L = 146 mm (5.8 in.)	R1					
L = 175 mm (6.9 in.)	R2					
L = 265 mm (10.5 in.)	R3					
L = 415 mm (16.4 in.)	R4					
L = U + 65 mm (2.5 in.) - ABB-standard	P1					
Acc. customer specification	D9					
Customer specific length	Z9					
<b>Measuring Inset Type</b>						
Without measuring inset	Y0					
RTD, TF, Basic application, measuring range -50 ... 400 °C (-58 ... 752 °F), 10 g	S1					
RTD, TF, Extended vibration resistance, measuring range -50 ... 400 °C (-58 ... 752 °F), 60 g	S2					
RTD, TF, Extended measuring range -196 ... 400 °C (-321 ... 752 °F), 10 g	S3					
RTD, TF, Extended vibration resistance, extendend measuring range -196 ... 400 °C (-321 ... 752 °F), 60 g	S4					
RTD, WW, Extended measuring range -196 ... 600 °C (-321 ... 1112 °F), 10 g	D1					
RTD, WW, Extended vibration resistance, extendend measuring range -196 ... 600 °C (-321 ... 1112 °F), 60 g	D3					
RTD, adjustable to German calibration regulations, sign of app. 000/308 - without calibration	E1					
RTD, custody preliminary, adjustable to German calibration regulations, sign of app. 000/308 - with calibration -10 °C and +50 °C	E2					
Thermocouple	T1					
Others	Z9					

Continued see next page

# SensyTemp TSP111, TSP121, TSP131

## Temperature sensors

Main ordering information SensyTemp TSP131	XX	XX	XX	XX
<b>Sensor Type and Wiring</b>				
Without measuring inset	Y0			
1 x Pt100, 2-wire	P1			
1 x Pt100, 3-wire	P2			
1 x Pt100, 4-wire	P3			
2 x Pt100, 2-wire	P4			
2 x Pt100, 3-wire	P5			
2 x Pt100, 4-wire	P6			
1 x Pt1000, 2-wire	P8			
1 x Pt1000, 3-wire	P7			
1 x Pt1000, 4-wire	P9			
1 x Type K (NiCr-NiAl)	K1			
2 x Type K (NiCr-NiAl)	K2			
3 x Type K (NiCr-NiAl)	K3			
1 x Type J (Fe-CuNi)	J1			
2 x Type J (Fe-CuNi)	J2			
1 x Type L (Fe-CuNi)	L1			
2 x Type L (Fe-CuNi)	L2			
1 x Type N (NiCrSi-NiSi)	N1			
2 x Type N (NiCrSi-NiSi)	N2			
1 x Type T (Cu-CuNi)	T1			
2 x Type T (Cu-CuNi)	T2			
1 x Type E (NiCr-CuNi)	E1			
2 x Type E (NiCr-CuNi)	E2			
1 x Type S (Pt10Rh-Pt)	S1			
2 x Type S (Pt10Rh-Pt)	S2			
Others	Z9			
<b>Sensor Accuracy</b>				
Without measuring inset	Y0			
Accuracy Class B, IEC 60751	B2			
Wire Wound, Double, Accuracy Class A, IEC 60751, Range 0 ... 250 °C (32 ... 482 °F)	D2			
Wire Wound, Accuracy Class A, IEC 60751, Range -100 ... 450 °C (-148 ... 842 °F)	D1			
Thin Film, Accuracy Class A, IEC 60751, Range -30 ... 300 °C (-22 ... 572 °F)	S1			
Thin Film, Accuracy Class AA, IEC 60751, Range 0 ... 100 °C (0 ... 212 °F)	S3			
Thin Film, Accuracy Class A extended according to IEC 60751, Range -196 ... 400 °C (-320,8 ... 752 °F)	S6			
Thin Film, Accuracy Class AA extended according to IEC 60751, Range -196 ... 400 °C (-320,8 ... 752 °F)	S8			
Thermocouple, Accuracy Class 2, IEC 60584	T2			
Thermocouple, Accuracy Class 1, IEC 60584	T1			
Thermocouple, Standard Accuracy ANSI MC96.1	T4			
Thermocouple, Special Accuracy ANSI MC96.1	T3			
Thermocouple, Accuracy according to DIN 43710	T5			
Others	Z9			

Continued see next page

Main ordering information SensyTemp TSP131	XX	XX
<b>Connection Head Type / Material</b>		
BUZ / Aluminum, flat cover, hinged	B1	
BUZH / Aluminum, high cover, hinged	B2	
BUZHD / Aluminium, high cover with display, hinged	B3	
BUKH / Polyamide, high cover, hinged	K1	
BEG / Stainless steel, screwed cover	E1	
BUS / Aluminium, hinged cover with snap lock	B4	
BUSH / Aluminium, high cover, hinged with snap lock	B5	
BBK / Polyamid, screwed cover	K2	
B / Aluminum, cover held on with screws	B6	
BH / Aluminium, high cover	B7	
BUG / Cast iron, hinged cover	G1	
Others	Z9	
<b>Transmitter</b>		
Without transmitter, sensor with ceramic terminal block - spring loaded	Y1	
Without transmitter, sensor with flying leads and metal plate - spring loaded	Y2	
TTH300-HART, programmable, output signal 4 ... 20 mA, dual input	H4	
TTH300-HART, Ex version, programmable, output signal 4 ... 20 mA, dual input	H5	
TTH300-PA, programmable, output PROFIBUS PA, dual input	P6	
TTH300-PA, Ex version, programmable, output PROFIBUS PA, dual input	P7	
TTH300-FF, programmable, output FOUNDATION fieldbus H1, dual input	F6	
TTH300-FF, Ex version, programmable, output FOUNDATION fieldbus H1, dual input	F7	
TTH200-HART, programmable, output signal 4 ... 20 mA	H6	
TTH200-HART, Ex version, programmable, output signal 4 ... 20 mA	H7	

# SensyTemp TSP111, TSP121, TSP131

## Temperature sensors

### Additional ordering information SensyTemp TSP131

	XX	XX	XX
<b>Transmitter Measuring Range</b>			
Standard measuring range	A0		
Customer-specific measuring range	AZ		
<b>Certificates</b>			
Declaration of compliance according EN 10204-2.1, with the order	C4		
Test report according EN 10204-2.2, material monitoring for wetted parts	C1		
Test report according EN 10204-2.2 for batch values, MIC-TC	C5		
Test report according EN 10204-2.2 for measuring of insulation resistance at ambient temperature	CN		
Inspection certificate according EN 10204-3.1, material monitoring for wetted parts	C2		
Inspection certificate according EN 10204-3.2, material monitoring for wetted parts	C3		
Inspection certificate according EN 10204-3.1, visual, dimensional and functional test	C6		
Inspection certificate according EN 10204-3.1, helium leakage test	C7		
Inspection certificate according EN 10204-3.1, dye penetration test	C9		
Inspection certificate according EN 10204-3.1, Positive Material Identification (PMI)	CA		
Inspection certificate according EN 10204-3.1, pressure test on thermowell	CB		
Inspection certificate according EN 10204-3.1, sensor tolerance	CC		
TÜV certificate for functional safety SIL2 IEC 61508 for sensor with integrated transmitter, HART	CS		
Inspection certificate according EN 10204-3.1, sensor calibration, single RTD	CD		
Inspection certificate according EN 10204-3.1, sensor calibration, double RTD	CE		
Inspection certificate according EN 10204-3.1, sensor calibration, single thermocouple	CF		
Inspection certificate according EN 10204-3.1, sensor calibration, double thermocouple	CG		
DAkkS sensor calibration, single RTD, calibration certificate per thermometer	CH		
DAkkS sensor calibration, double RTD, calibration certificate per thermometer	CJ		
DAkkS sensor calibration, single thermocouple, calibration certificate per thermometer	CK		
DAkkS sensor calibration, double thermocouple, calibration certificate per thermometer	CL		
Inspection certificate according EN 10204-3.1, x-ray- test for weldings	CU		
Inspection certificate according EN 10204-3.1, x-ray- test for bore concentricity	CV		
Inspection certificate according EN 10204-3.1, ultrasonic- test for bore concentricity	CW		
Others	CZ		
<b>Number of Calibration Test Points</b>			
1 point	P1		
2 points	P2		
3 points	P3		
4 points	P4		
5 points	P5		

<b>Additional ordering information SensyTemp TSP131</b>	<b>XX</b>	<b>XX</b>	<b>XX</b>
<b>Temperatures for Sensor Calibration</b>			
Standard calibration: 0 °C (32 °F)	V1		
Standard calibration: 100 °C (212 °F)	V2		
Standard calibration: 400 °C (752 °F)	V3		
Standard calibration: 0 °C and 100 °C (32 °F and 212 °F)	V4		
Standard calibration: 0 °C and 400 °C (32 °F and 752 °F)	V5		
Standard calibration: 0 °C, 100 °C and 200 °C (32 °F, 212 °F and 392 °F)	V7		
Standard calibration: 0 °C, 200 °C and 400 °C (32 °F, 392 °F and 752 °F)	V8		
Standard calibration: Customer specific temperatures	V6		
DAkkS calibration: 0 °C (32 °F)	D1		
DAkkS calibration: 100 °C (212 °F)	D2		
DAkkS calibration: 400 °C (752 °F)	D3		
DAkkS calibration: 0 °C and 100 °C (32 °F and 212 °F)	D4		
DAkkS calibration: 0 °C and 400 °C (32 °F and 752 °F)	D5		
DAkkS calibration: 0 °C, 100 °C and 200 °C (32 °F, 212 °F and 392 °F)	D7		
DAkkS calibration: 0 °C, 200 °C and 400 °C (32 °F, 392 °F and 752 °F)	D8		
DAkkS calibration: Customer specific temperatures	D6		
<b>Thermowell Options</b>			
Thermowell stainless steel with additional tantalum sleeve	S1		
Thermowell coated with 0.5 mm (0.02 in.) E-CTFE / Halar, wetted parts incl. flange surface	S2		
Thermowell coated with 0.5 mm (0.02 in.) PFA, wetted parts incl. flange surface	S3		
Thermowell coated with 1 mm (0.04 in.) NiCrB / META 43	2) S4		
Thermowell coated with 0.5 mm (0.02 in.) NiZrO2 / PL1312	2) S5		
Thermowell incl. tests and certificates AD-2000 standard for austenitic steel	S6		
Thermowell incl. tests and certificates AD-2000 standard for high temperature steel	S7		
Thermowell incl. tests and certificates NACE MR 01-75	S8		
Thermowell clean for oxygen service	S9		
Thermowell stress calculation according ASME 19.3-TW 2010 (Murdock)	SM		
Thermowell with plug, gasket and chain	SP		
Thermowell with plug and gasket	SR		
Others	SZ		
<b>Flange Connection Options</b>			
Flange raised face form RF, ASME B16.5	F6		
Flange raised face form B1 acc. EN 1092-1	F7		
Flange raised face form B2 acc. EN 1092-1	F8		
Flange facing with tongue form C EN 1092-1	F1		
Flange facing with groove form D EN 1092-1	F2		
Flange facing with RTJ surface ASME B16.5	F3		
Flange full penetration welded	F4		
Others	FZ		

# SensyTemp TSP111, TSP121, TSP131

## Temperature sensors

Additional ordering information SensyTemp TSP131	XX						
<b>Extension Tube Diameter Options</b>							
Extension Diameter 14,0 x 2,5 mm	N1						
Extension Diameter 11,0 mm	N2						
<b>Extension Tube Options</b>							
Extension tube welded with measuring inset, gas tight	N3						
<b>Measuring Inset: Option</b>							
Hot junction grounded	J1						
2 insets paired from 0 ... 100 °C (32 ... 212 °F), max. deviation 0.1 K	J3						
Improvement Sensor Accuracy to 0.5 Cl. A, 0 ... 100°C, U>100 mm	J8						
Improvement Sensor Accuracy to 0.5 Cl. A, 0 ... 400°C, U>250 mm	J9						
<b>Measuring Inset: Transmitter Mounted</b>							
Transmitter mounted on inset, without ceramic block	J2						
<b>Measuring Inset: Other Options</b>							
Others	JZ						
<b>Connection Head Options</b>							
Second transmitter mounted in connection head (same type as first one)	H1						
Connection head seawater-resistant, painted grey-white	H3						
Others	HZ						
<b>Cable Entry Options</b>							
1 x M20 x 1.5, without cable gland	U1						
1 x 1/2 in. NPT, without cable gland	U2						
1 x 3/4 in. NPT, without cable gland	U3						
2 x M20 x 1.5, without cable gland	U4						
2x M20 x 1.5, with cable gland skintop, temperature range -40 bis +70 °C (-40 bis +158 °F), cable diameter 5,5 ... 13 mm (0,22 ... 0,51 inch)	U7						
Harting Han 7D plug and socket connection	UG						
Harting Han 8D (8U) plug and socket connection	UH						
M12 plug for PROFIBUS PA	UJ						
7/8 in. plug for FOUNDATION fieldbus	UK						
Others	UZ						

<b>Additional ordering information SensyTemp TSP131</b>		<b>XX</b>	<b>XX</b>	<b>XX</b>	<b>XX</b>	<b>XX</b>
<b>Display Type</b>						
LCD indicator type AS		L1				
Configurable LCD Indicator type A		L2				
<b>Other Options</b>						
Thermometer silicone-free			PS			
Earth screw external			PG			
Each Thermometer single packed - Polyethylen			PN			
<b>Documentation Language</b>						
German			M1			
English			M5			
Language package Western Europe / Scandinavia (Languages: DA, ES, FR, IT, NL, PT, FI, SV)			MW			
Language package Eastern Europe (Languages: EL, CS, ET, LV, LT, HU, HR, PL, SK, SL, RO, BG)			ME			
<b>Additional TAG Plate</b>						
Stainless steel plate with TAG no.				T1		
<b>Additional Identification Plate</b>						
Stainless steel plate with customer specific text					T2	
Adhesive label					T3	

- 1) According EN 60079-0 and EN 61241-0, the application in hybrid mixtures (concomitance of potentially explosive dust and gas) is currently not allowed  
 2) Specify length from thermowell tip in mm

### Trademarks

- ® HART is a registered trademark of FieldComm Group, Austin, Texas, USA
- ® PROFIBUS and PROFIBUS PA are registered trademarks of PROFIBUS & PROFINET International (PI)
- ® FOUNDATION Fieldbus is a registered trademark of FieldComm Group, Austin, Texas, USA
- ™ Hastelloy C-276 is a Cabot Corporation trademark
- ™ Hastelloy C-276 is a Haynes International trademark
- ™ Hastelloy C-4 is a Haynes International trademark
- ® Monel is a registered trademark of Special Metals Corporation

# Notes



---

**ABB Limited****Measurement & Analytics**

Howard Road, St. Neots  
Cambridgeshire, PE19 8EU

UK

Tel: +44 (0)870 600 6122

Fax: +44 (0)1480 213 339

Email: [enquiries.mp.uk@gb.abb.com](mailto:enquiries.mp.uk@gb.abb.com)

**ABB Inc.****Measurement & Analytics**

125 E. County Line Road  
Warminster, PA 18974

USA

Tel: +1 215 674 6000

Fax: +1 215 674 7183

**ABB Automation Products GmbH****Measurement & Analytics**

Schillerstr. 72

32425 Minden

Germany

Tel: +49 571 830-0

Fax: +49 571 830-1806

**[abb.com/temperature](http://abb.com/temperature)**

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail.  
ABB does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB.